

VCS-05

VCS Series • Top or Bottom • Level Sensor

Features

- Overall length less than 60mm
- Internal Fit
- 22mm diameter float
- Nylon 6.6 material

Comments

- High or Low level sensing
- N/O or N/C by float reversal
- Reed Switch Reliability (UL File E153493)
- Encapsulated Magnet
- Interface Option Available

Applications

- Fuel level
- Sump level
- Alcohol level
- Organic Solvents level
- Chemical level

VCS-05

VCS Series • Top or Bottom • Level Sensor

Material

Housing Material	Nylon 6.6
Float Material	Nylon 6.6
Contact Material	Ruthenium
Float SG	0.66
Operating Temperature °C	-30 to 105
Medium	Fuels & Oils
Housing Colour	Blue
Float Colour	Blue

Cable

Cable Length	2 x 0.1M
Connection Type	Stripped Cables
Cable Type	22 AWG 16/0.2mm PVC insulated
Cable Colour	Black/Black

Mechanical Specifications

Shock	3 half-sine pulses of 11mS, 30G
Vibration	35g up to 500Hz
Float Diameter	22.3mm
IP	IP65


Mounting

Thread	1/8
Fitment	Internal Fit
Mounting	Top or Bottom entry

Switching

Switch Action (Reed Switch)	SPST
Max Switching Voltage VDC	200
Max Switching Voltage VAC	250
Max Switching Current Amps	1
Max Switching Load Watt	30
Operate Mode	N/C with float at bottom stop
Contact Form	A

Technical Drawing

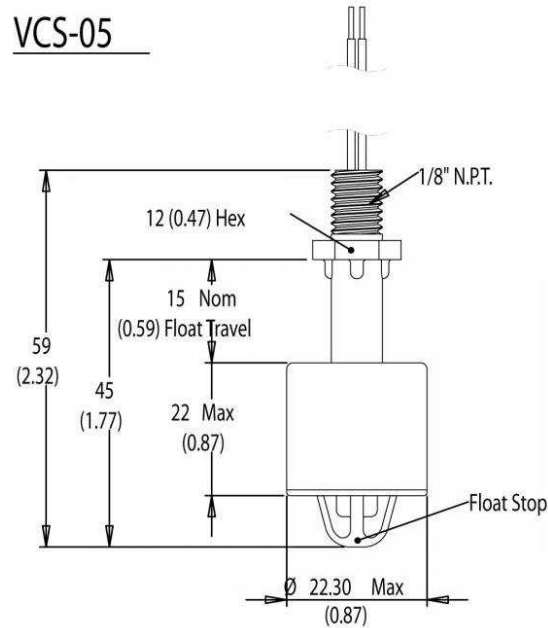

NORTH AMERICA & EUROPE

MEAS Deutschland GmbH
a TE Connectivity Company
Hauert 13
D-44227 Dortmund
Germany
Phone: +49-(0)231-9740-0
Fax: +49-(0)231-9740-20
Email: info.de@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057 China
Tel +86 755 3330 5088
Fax +86 755 3330 5099

te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, MEAS, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.