



FEATURES

- High accuracy
- Tension and Compression
- Integrated Mechanical Stops
- Full Wheatstone bridge
- Cable output

APPLICATIONS

- Process control equipment
- Medical Instruments
- Weighing
- Laboratory and Research
- Calibration test benches

FN3280

Low Range Load Cell with Mechanical Stops

SPECIFICATIONS

- **Very low range: 1 N to 5 N (0.2 lbf to 1 lbf)**
- **S-Beam with mechanical stops**
- **Very high resolution**
- **Combined non-linearity & hysteresis 0.1% F.S.**

The **FN3280** S-beam load cell is designed to measure low force and has standard ranges of 1 N to 5 N [0.2 lbf to 1 lbf]. Integrated mechanical stops protect against accidental overloads up to 100 times F.S. The **FN3280** provides a combination of economy and performance, this low cost load cell has an accuracy of 0.1% F.S.

For higher ranges, the model **FN3148** can measurement loads from 10 N to 2 kN [2 to 400 lbf] with mechanical stops.

With many years of experience as a designer and manufacturer of sensors, TE CONNECTIVITY often works with customers to design or customize sensors for specific uses and testing environments.

To meet your needs we also offer complete turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

On request, Instruction documents can be provided to ease the selection and use of our sensors and provide helpful tips.

STANDARD RANGES

Ranges in N (FS)	1	2	5
Ranges in lbf	0.2	0.4	1
Stiffness in N/m	2.5x10 ³	2.75x10 ³	1.25x10 ⁴
Stiffness in lbf/ft	1.7x10 ²	1.9x10 ²	8.6x10 ²

PERFORMANCE SPECIFICATIONS

All values are typical at temperature 20 ±1°C

Parameters	
Operating Temperature Range (OTR)	-20 to 80° C [-4 to 176° F]
Compensated Temperature Range (CTR)	0 to 60° C [32 to 140° F]
Thermal Zero Shift in CTR	<0.5% F.S. / 50° C [/100° F]
Thermal Sensitivity Shift in CTR	<0.5 % of reading / 50° C [/100° F]
Over-Range	
Without Damage	40 to 100 x F.S. (see table page 3)
Accuracy	
Combined non Linearity & Hysteresis	±0.1% F.S.



Electrical Characteristics

Model	FN3280
Supply Voltage	10Vdc
Sensitivity "FSO"	±1mV/V for 1N range ±1.5mV/V for 2N and 5N ranges
Zero Offset	±5% F.S.
Input Impedance/Consumption	300 to 400Ω
Output Impedance	300 to 400Ω
Insulation under 50Vdc	≥100MΩ

Notes

1. Electrical Termination: Shielded Ø2.2 mm cable, 4 wires (AWG32) standard length 2 m
2. Materials: Body and cover in aluminum alloy
3. CE conformance according to EN 61010-1, EN 50081-1, EN 50082-1

DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)

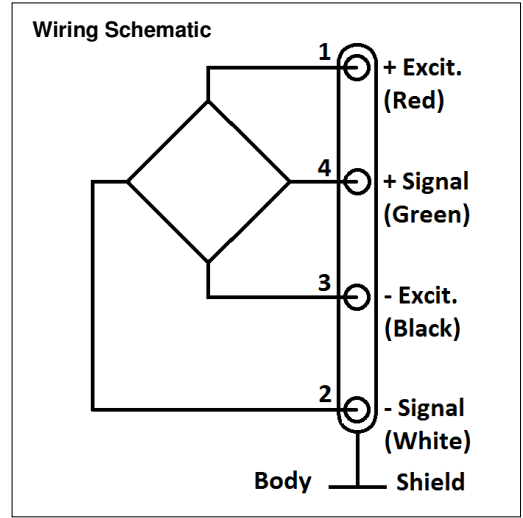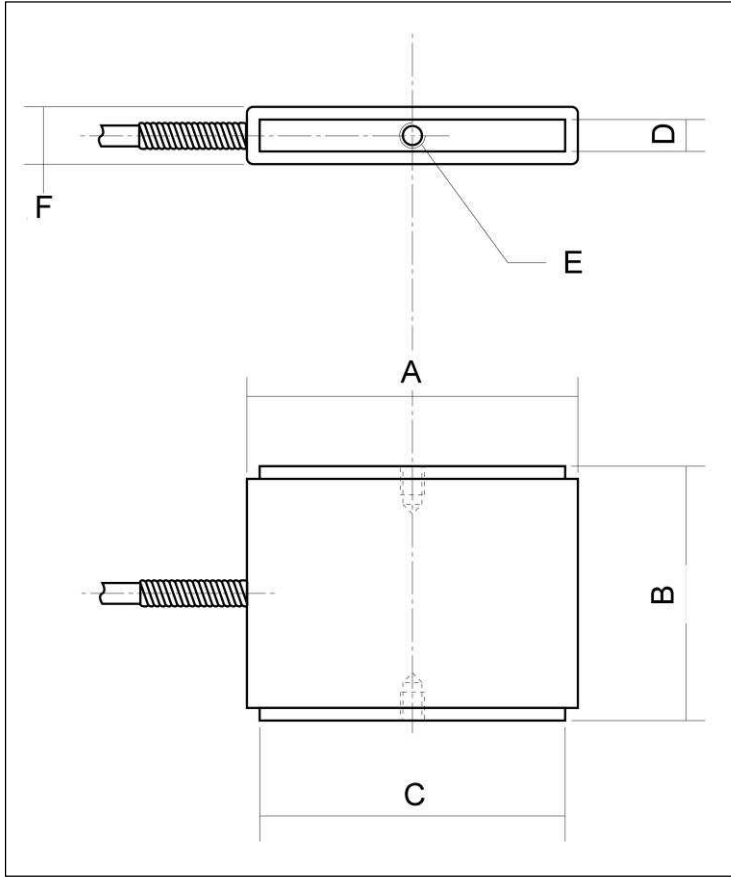

Dimensions in mm [inch]

Range in N [in lbf]	1 [0.2]	2 [0.4]	5 [1]
A	48 [1.89]		48 [1.89]
B	40 [1.57]		50 [1.57]
C	48 [1.89]		48 [1.89]
D	5 [0.20]		15 [0.59]
E (Thread)	M3 depth 6 [0.24]		M4 depth 6 [0.24]
F	9 [0.35]		19 [0.75]
Over-range in N [in lbf]	100 [20]		200 [40]


FN3280

Low Range Load Cell with Mechanical Stops

OPTIONS

L00M : special cable length, replace "00" with total length in meters.

ORDERING INFO

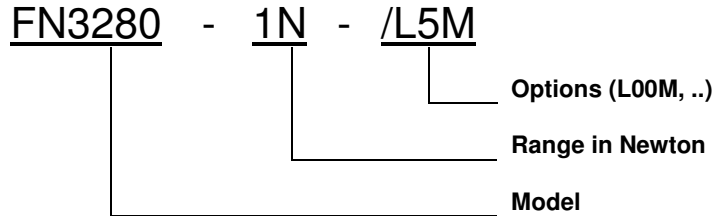

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Vibration Design Center
32 Journey - Suite 150
Aliso Viejo, CA 92656
United States USA
Tel: 1-949-716-0877
Fax: 1-949-916-5677
t&m@meas-spec.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
26 Rue des Dames
78340 Les Clayes-Sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
cs.lcsb@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Phone: +86-755-33305088
Fax: +86-755-33305099
pfg.cs.asia@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.