

RCI9H2 FOR NELES VALVGUARD VG9000H



Remote Communication Interface RCI9H2 is intended to be used together with the Neles ValvGuard VG9000H intelligent safety solenoid. When 24 VDC output (DO) in the safety system or logic is needed RCI9H2 is needed between the DO and VG9000H field device. The primary function of RCI9H2 is to convert binary signal to SIL 3 compatible 4/20mA current signal. RCI9H2 also provides relay outputs for monitoring the test and alarm status of the VG9000H and a discrete input for commanding VG9000H to start a PST (Partial Stroke Test). Additionally, RCI9H2 includes an isolator barrier and can be used in intrinsically safe applications. RCI9H2 provides HART communication for diagnostics and configuration of the VG9000H. The HART communication is available when a 24 VDC power supply is connected, also during the emergency trip.

FEATURES

- 24 VDC input from ESD system
- 4/20 mA output to VG9000H
- Two status relays (test, alarm)
- PST start via separate input
- HART communication
- Isolated Ex barrier

SIL 3 certificate

RCI9H2 is approved by TÜV Rheinland to be used in safety applications up to and including safety integrity level 3 (SIL3) according to IEC 61508.

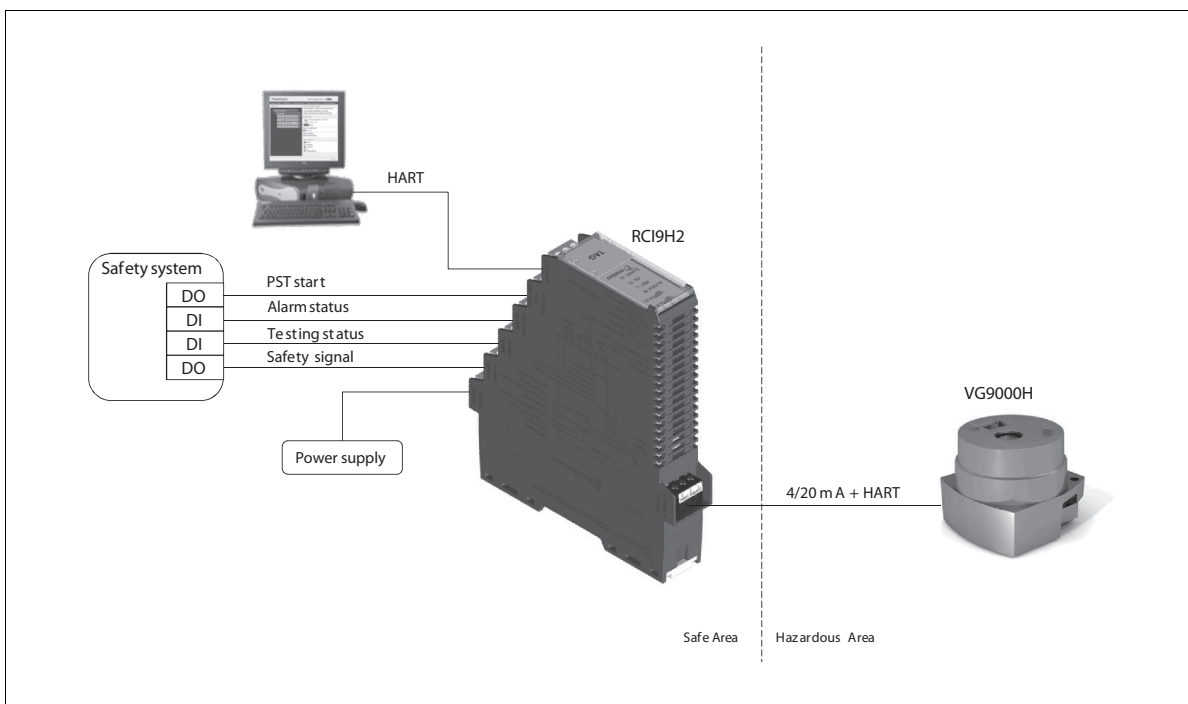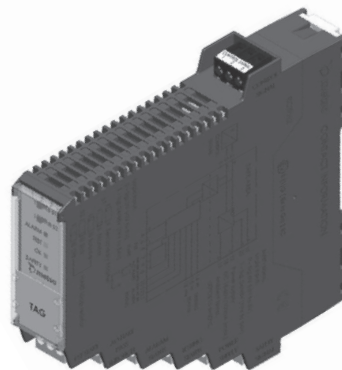

TECHNICAL SPECIFICATIONS

Safety (input) signal:

Connection:	Terminals 19+, 20-
Signal levels:	0-Signal: nominal 0V (-3 - 5V) (leakage <2 mA) 1-Signal: nominal 24/48V (19 - 54 VDC)
Input Current:	46.4mA at 24VDC, 47.9mA at 48VDC
Max Voltage:	60 VDC
Polarity protection:	-60 VDC
Over Voltage Protection:	60 VDC

Output to VG9000H:

Connection:	Terminals 2+, 3-
Output current, normal mode:	0-Signal: nominal 4.2mA, (3.8 -5.6 mA) 1-Signal: nominal 20.5mA, (18-22 mA)
Output current, loop powered mode 1 (power supply not connected):	0-Signal: nominal 0 mA 1-Signal: nominal 16.4 mA, (16-17 mA)
Output current, loop powered mode 2 (power supply connected parallel with the safety signal):	0-Signal: nominal 0 mA 1-Signal: nominal 20.5 mA, (18-22 mA)
Maximum load:	596 Ω
Response time:	Input to output <100 ms

Power Supply:

Connection:	Terminals 16+, 17-
Input voltage:	0-Signal: nominal 0V (-3 - 5V) 1-Signal: nominal 24/48V (19 - 54 VDC)
Input current:	57.4 mA at 24 VDC, 30.7 mA at 48 VDC.
Max Voltage:	60 VDC
Polarity protection:	-60 VDC
Over Voltage Protection:	60 VDC

HART:

Connection:	Terminals 7-, 8+ (source) Terminals 7+, 9- (sink)
Input current:	Fixed at 11 mA, source or sink mode
Source mode:	Output voltagemax 24 VDC External load max 600 Ω
Sink mode:	Input voltage 24 VDC (nominal) Internal load 230 Ω

PST start:

Connection:	Terminals 4+, 5-
Signal level:	0-Signal: nominal 0V (-3 - 5V) 1-Signal: nominal 24/48V (19 - 54 VDC)
Signal type:	Rising edge active
Input current:	4.74 mA at 24 VDC, 9.47mA at 48 VDC
Max Voltage:	60 VDC
Polarity protection:	-60 VDC
Over Voltage Protection:	60 VDC

Testing Status:

(Test Status Relay OFF with Test Status LED OFF indication):	
Connection:	Terminals 13-14 open Terminals 13-15 connected
(Test Status Relay ON with Test Status LED ON indication):	
Connection:	Terminals 13-15 open Terminals 13-14 connected
Relay:	Type SPDT Current 1A (max) Voltage 24V (nominal)

Alarm Status:

(Alarm status relay OFF with Alarm Status LED ON indication):	
Connection:	Terminals 10-11 open Terminals 10-12 connected
(Alarm Status relay ON with Alarm Status LED OFF indication):	
Connection:	Terminals 10-12 open Terminals 10-12 connected
Relay:	Type SPDT Current 1A (max) Voltage 24V (nominal)

Ambient conditions:

Ambient temperature range:	-20° to +60 °C
----------------------------	----------------

Mechanical specifications:

Protection degree:	IP20
Weight:	Approx. 215g
Dimensions:	151.5 x 136.2 x 25.2 mm
Mounting:	On 35 mm DIN mounting rail acc. to EN 60715

Data for application in connection with Ex-areas:



ATEX/IECEX:	II (1)G [Ex ia Ga] IIC
Ex values:	U _o = 24.5 V I _o = 93.6 mA P _o = 595 mW C _o = 0.117 μ F L _o = 4.29 mH

Approvals


Safety:	Certified by TUV Rheinland up to and including SIL3 according to IEC61508
IECEX:	IECEX Sira 13.0014X
ATEX:	Sira 13ATEX2026X
Electromagnetic compatibility:	According to EN61326, EN61000-6-2, EN61000-6-4

ADDITIONAL ACCESSORIES

Wiring connections

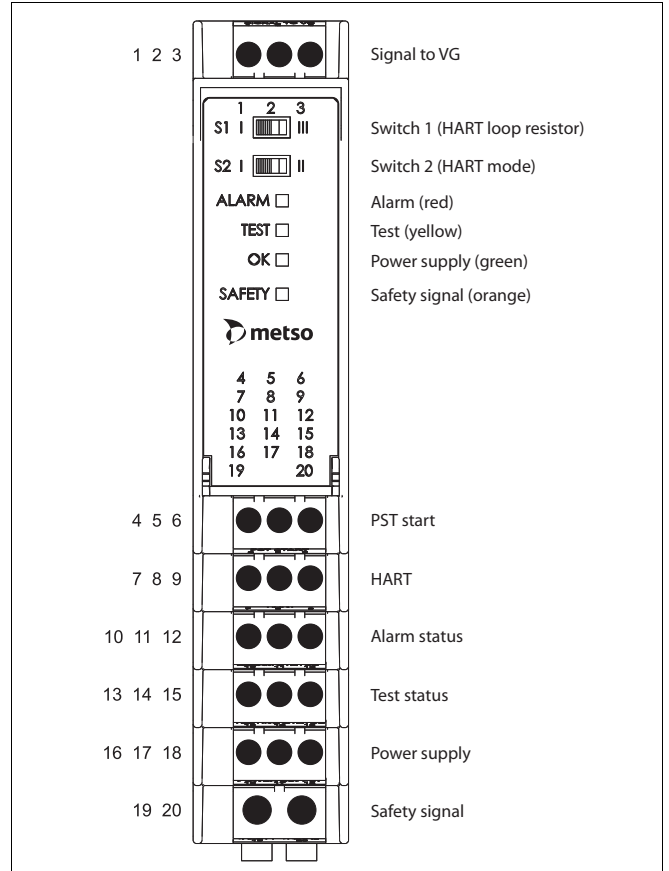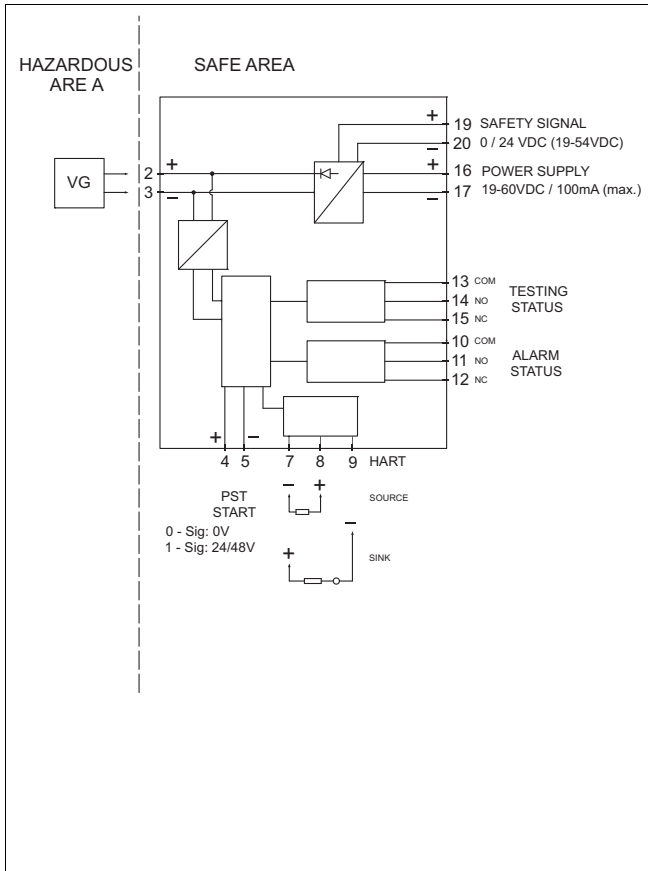

Dimensions (mm)

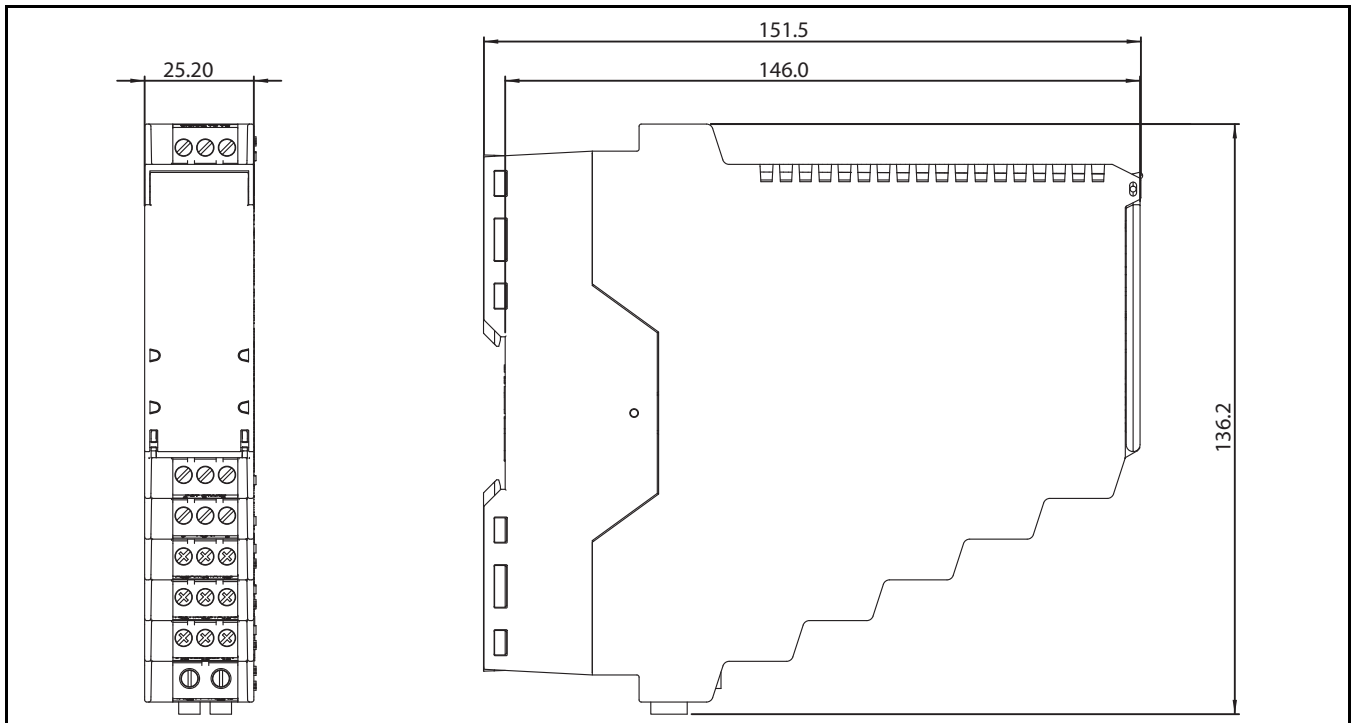

Subject to change without prior notice.

Metso Flow Control Inc.

Europe, Vanha Porvoontie 229, P.O. Box 304, FI-01301 VANTAA, Finland.
Tel. +358 20 483 150. Fax +358 20 483 151

North America, 44 Bowditch Drive, P.O. Box 8044, Shrewsbury, MA 01545, USA.
Tel. +1 508 852 0200. Fax +1 508 852 8172

South America, Av. Independência, 2500- Iporanga, 18087-101, Sorocaba-São Paulo, Brazil.
Tel. +55 15 2102 9700. Fax +55 15 2102 9748/49

Asia Pacific, Haw Par Centre #06-01, 180 Clemenceau Avenue, Singapore 239922.
Tel. +65 6511 1011. Fax +65 6250 0830

China, 11/F, China Youth Plaza, No.19 North Rd of East 3rd Ring Rd, Chaoyang District,
Beijing 100020, China. Tel. +86 10 6566 6600. Fax +86 10 6566 2583.

Middle East, Roundabout 8, Unit AB-07, P.O. Box 17175, Jebel Ali Freezone, Dubai,
United Arab Emirates. Tel. +971 4 883 6974. Fax +971 4 883 6836

www.metso.com/valves

