
Circular Connector

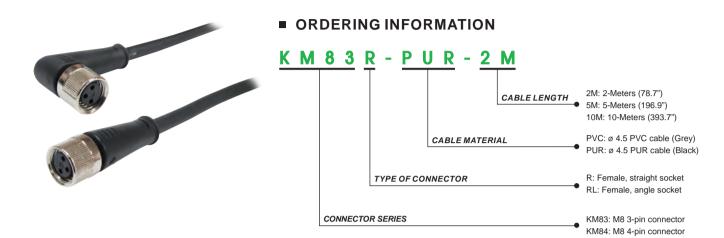


■ SPECIFICATION


TYPE	KM83R-□ KM83RL-□		KM84R-□ KM84RL-□	
FEMALE PINOUT	_4_		42_	
CHARACTERISTICS	<u>3</u> <u>1</u>		3 1	
Conductor colors	1:Brown 3:Blue 4:Black		1:Brown 2:White 3:Blue 4:Black	
NUMBER OF CONTACTS	3		4	
RATED VOLTAGE	60V AC/DC			
RATED CURRENT	3A			
CONTACT MATERIAL	Gold plated brass			
CONTACT BEARER MATERIAL	PC+ABS			
HOUSING MATERIAL	TPV			
HOUSING COLOR	Black			
CABLE MATERIAL	PVC	PUR	PVC	PUR
CABLE COLOR	Gray	Black	Gray	Black
CABLE CONDUCTOR	24AWG (0.22mm²)			
CIRCUIT	0.177" (4.5mm²)			
LED COLOR	•			
PROTECTION CLASS(IEC60529)	IP67			
TEMPERATURE RANGE	-20~80°C (-4~176°F)			

DIMENSIONS

KM83R/KM84R



KM83RL/KM84RL



Unit:mm