


## NELES® R-SERIES SEGMENT VALVE Flanged RE and Wafer RE1

Metso's *Neles* RE series control valves are economical, high performance valves in a quarter-turn design. They are offered with a variety of trim options from standard and low Cv trims for general applications to noise/cavitation *Q-Trim™* for reducing aerodynamic noise and preventing cavitation.

Standard units are equipped with either diaphragm or cylinder actuators and ND9000 intelligent valve controllers for precise control, reliability and performance monitoring on-line.

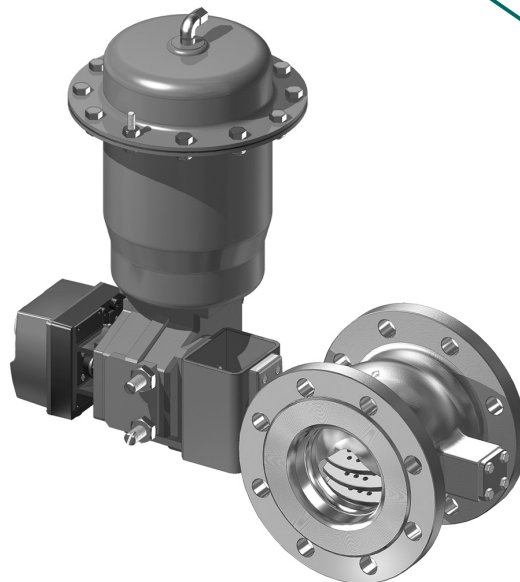

### FEATURES

#### Integral body construction

- Integrally flanged R-Series valves feature one piece body construction with no flange rings, inserts or end caps to create potential leak paths, even if the valve is subjected to pipe bending forces. Seating capabilities are totally unaffected by pipeline forces, which assures reliable valve operation.

#### Accurate Control

- Carefully designed V-ported segmented ball, low torque requirements and backlash-free movement results in exceptional control performance. This design provides steady and gentle contact between the seat and segment at all times to minimize friction while at the same time providing exceptional control characteristics. Bearings are located inside the valve body providing larger bearing areas, lower bearing loads and longer bearing life.

#### Safety and Environmental

- Rotary operation reduces fugitive emissions dramatically compared to sliding stem designs. The R-series stem seal design meets the US clean Air Act and German TA-Luft requirements.

#### Durable metal seat

- The seat of the R-series V-port segment valve is firm and uniquely durable. The seat is designed in such a way that its sealing surface is not located directly in the flow stream. This gives the seat an extended service life. The working principle is a pressure-aided seat which enables good sealing properties at a low pressure difference. The seat is located inside the valve, which prevents forces from the pipe system influencing the sealing effect. Two-way tight seat is available as an option.

#### Economical

- Low torque operation reduces wear, resulting in better reliability. In addition, standard designs carry hard chromium facing on the segment and a stellited seat, which has been designed to avoid flow impingement. Together with a low load bearing design and liveloaded packing, operational life is improved and maintenance needs are minimized. Low torque combined with a well integrated actuator design provides a lower cost valve assembly.


#### Low flow and noise attenuation/cavitation *Q-Trim* options

- 1" valves feature five different segment sizes. They extend the valves' application range to very low-flow and high accuracy services, such as additive and coloring lines, pilot plants etc. Cavitation and aerodynamic noise are reduced with the patented *Q-Trim* option. This self-cleaning design handles contaminated flows (impure steam, river water, etc.) without plugging.

#### Reliable actuators

- Quadra-Powr® spring diaphragm operators provide safe, reliable operation even with minimal supply pressures are available. B-Series piston actuators are available in either double acting or spring return versions.

**EXPLODED VIEW**

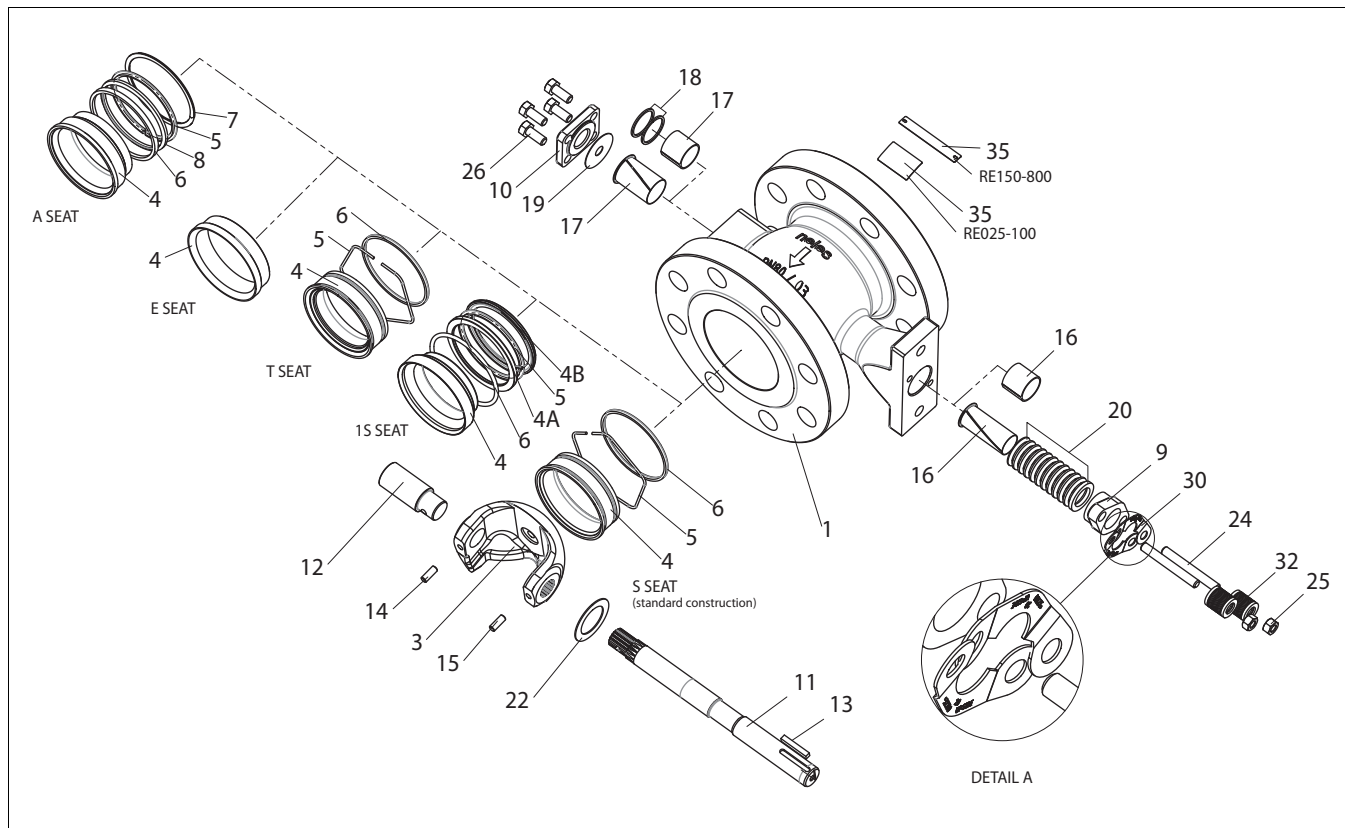

**PARTS LIST (standard construction)\***

Part	Name	BODY MATERIAL	
		Stainless steel	Carbon steel
1	Body	ASTM A351 gr. CF8M	ASTM A216 gr. WCB
3	V-port segment	AISI 329 + chromium / CG8M + chromium <sup>1)</sup>	AISI 329 + chromium / CG8M + chromium <sup>1)</sup>
4	Seat	AISI 316 + Cobalt based alloy / PTFE <sup>1)</sup>	AISI 316 + Cobalt based alloy / PTFE <sup>1)</sup>
4A	Back ring	AISI 316	AISI 316
4B	Support ring	AISI 316	AISI 316
5	Lock spring	INCONEL 625	INCONEL 625
6	Back seal	Stainless steel + PTFE / Viton GF / Graphite	Stainless steel + PTFE / Viton GF / Graphite
7	Retaining ring	EN 10028-1.4571	EN 10028-1.4571
8	Support ring	AISI 316	AISI 316
9	Gland follower	ASTM A351 gr. CF8M	ASTM A351 gr. CF8M
10	Blind flange	ASTM A351 gr. CF8M	ASTM A351 gr. CF8M
11	Drive shaft	AISI 329 / 17-4PH <sup>1)</sup>	AISI 329 / 17-4PH <sup>1)</sup>
12	Shaft	AISI 329 / 17-4PH <sup>1)</sup>	AISI 329 / 17-4PH <sup>1)</sup>
13	Key	AISI 329	AISI 329
14	Cylindrical pin	AISI 329 / 17-4PH <sup>1)</sup>	AISI 329 / 17-4PH <sup>1)</sup>
15	Cylindrical pin	AISI 329 / 17-4PH <sup>1)</sup>	AISI 329 / 17-4PH <sup>1)</sup>
16	Bearing	PTFE + SS net / cobalt based alloy <sup>1)</sup>	PTFE + SS net / cobalt based alloy <sup>1)</sup>
17	Bearing	PTFE + SS net / cobalt based alloy <sup>1)</sup>	PTFE + SS net / cobalt based alloy <sup>1)</sup>
18	Thrust bearing	Cobalt based alloy <sup>1)</sup>	Cobalt based alloy <sup>1)</sup>
19	Sealing plate	Graphite / PTFE	Graphite / PTFE
20	Packing	Graphite / PTFE	Graphite / PTFE
22	Filling ring (only low Cv 1"/DN 25)	Stainless Steel AISI 316	Stainless Steel AISI 316
24	Stud	ISO 3506 A4-80/B8M	ISO 3506 A4-80/B8M
25	Hexagon nut	ISO 3506 A4-80/B8M	ISO 3506 A4-80/B8M
26	Hexagon bolt	ISO 3506 A4-80/B8M	ISO 3506 A4-80/B8M
30	Retainer plate	AISI 316	AISI 316
32	Spring stack	SIS 2324 & CrMo Steel + ENP	SIS 2324 & CrMo Steel + ENP
35	Identification plate	AISI 316	AISI 316

<sup>1)</sup> Alternative materials

\* The parts are not in number order since certain parts have dedicated part numbers.

## TECHNICAL SPECIFICATIONS

### Type

Integrally flanged V-ported ball, quarter-turn valve  
 Pressure ratings are as follows:  
 Body: ASME 150 - 300, see page 5.  
 Trim: See tables on page 5.

### Sizes

RE1; 1", 1 1/2", 2", 3", 4", 6", 8"  
 RE; 1", 1 1/2", 2", 3", 4", 6", 8", 10", 12", 14", 16", 20", 24", 28", 32"

### End Connections

Wafer (RE1)  
 Flanged (RE, RE13)

### Face-to-face dimensions

ASME/ISA S75.04, IEC 534-3-2. IEC 534-3-2. Optional B16.10 with spool piece construction.

### Temperature range

-50 °C ... +260 °C / -58...+500 °F with soft bearings  
 -50 °C ... +315 °C / -58...+600 °F with metal bearings in sizes 2" - 10"  
 -50 °C ... +425 °C / -58...+800 °F with metal bearing and high temperature seats in sizes 2" - 10".

### Inherent flow characteristic

Standard V-port: Equal percentage.  
 Q-Trim: Modified equal percentage.

### Fire safety

Fire safe design to meet API 607, 3rd edition.

### Shut-off classification

ANSI/FCI 70.2 Class IV

- Standard with metal seats.  
 Tested with 50 psig water.

ANSI/FCI 70.2 Class V

- Standard with soft seats.  
 Tested with 100 psig water.

1/10th ANSI/FCI 70.2 Class IV (Not Available with Low Cv Trims)  
 - Optional with metal seats.  
 Tested with 50 psig air.

E-Seat is non-tight

### Flow capacity

See table on this page.

### Valve trim rotation

Clockwise to close.

### OPTIONS

Q-trim:

Inch 2", 3", 4", 6", 8", 10", 12", 14", 16", 20", 24", 28", and 32"

Reduced Cv trim: For 1" valve only.

### Valve body and seat test


All valves manufactured by Metso undergo pressure testing. The test pressure of R-series valve body is 1.5 x the pressure rating and the standard test pressure of seat is 1.1 x the maximum permissible shut-off pressure or lower depending on size and material. The test medium is water containing a corrosion inhibitor. Seat design options shown on the next page.

### Maximum Cv Coefficients for R-Series Valves

Size		Metal Seat, S	Q-Trim S Seat	Metal Seat, 1S	Q-Trim 1S Seat	Soft Seat, T	Q-Trim, T Seat	Metal Seat, A	Q-Trim, A Seat
INCH	DN	C <sub>V</sub> 100 % <sup>1)</sup>	C <sub>V</sub> 100 % <sup>2)</sup>	C <sub>V</sub> 100 %	C <sub>V</sub> 100 %	C <sub>V</sub> 100 %	C <sub>V</sub> 100 %	C <sub>V</sub> 100 %	C <sub>V</sub> 100 %
1	25	45	-	24	-	21	-	-	-
1.5	40	110	-	58	-	61	-	-	-
2	50	180	47	115	30	110	29	130	39
2.5	65	280	96	210	72	215	74	-	-
3	80	420	160	342	130	340	130	350	150
4	100	620	250	510	210	520	210	540	220
6	150	1260	540	1160	500	1070	459	1100	500
8	200	2030	880	1910	830	1760	763	1800	835
10	250	3210	1510	3050	1440	2830	1331	3000	1420
12	300	4490	2140	4340	2070	4080	1945	-	-
14	350	6440	3160	6220	3050	5750	2821	-	-
16	400	8510	4180	8330	4090	7630	3748	-	-
20	500	13020	6600	12560	6370	11670	5916	-	-
24	600	-	-	19700	9230	-	-	-	-
28	700	-	-	25300	13700	-	-	-	-
32	800	-	-	32000	16181	-	-	-	-

1) 100 % corresponds to 95° turning angle

2) For Q-R-valves, 100 % corresponds to 90° turning angle

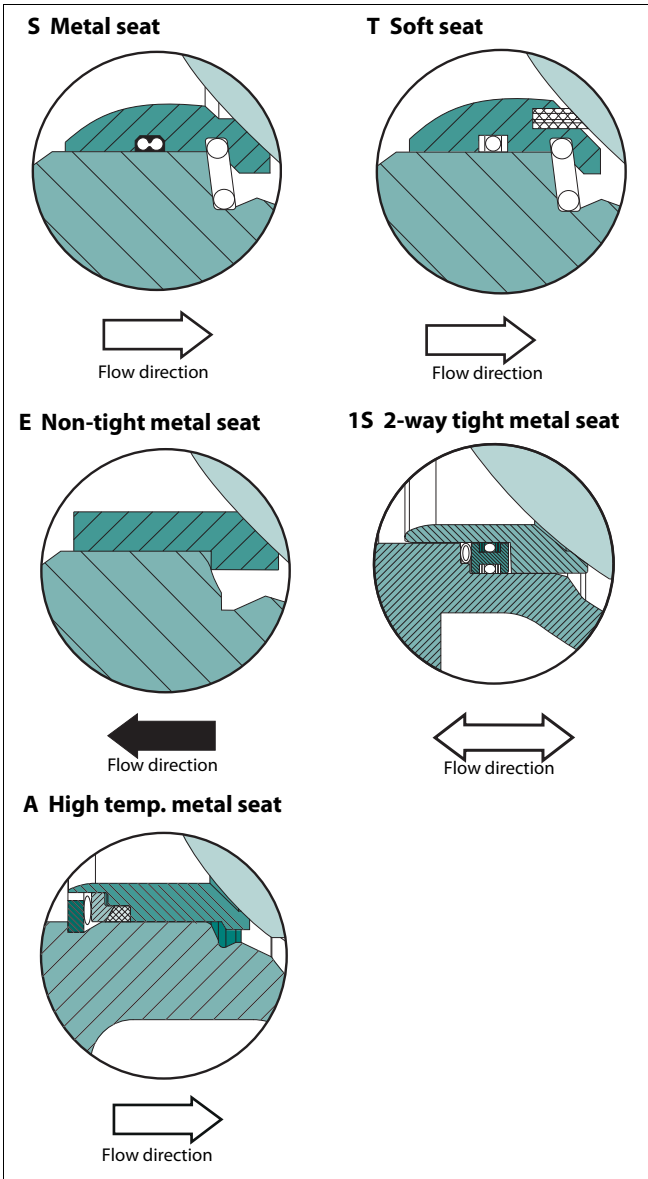

**SEAT DESIGNS**

**S Metal seat**

Seat:	316 SS + Cobalt based hard facing, sizes 1" - 32" / DN 25 - 800
Spring:	Inconel 625
Seat seal:	Filled PTFE lipseal / SS Elgiloy spring
Temp. Range:	-50 °C... +315 °C / -58 °F ...+600 °F
Service:	General

**T Soft seat**

Seat:	316 SS with PTFE + X-treme®, sizes 1" - 6" 316 SS with PTFE + C25 % insert, sizes 8" - 32"
Spring:	Inconel 625
Seat seal:	Filled PTFE lipseal
Back seal:	PTFE
Temp. Range:	-50 °C... +260 °C / -58 °F ...+500 °F
Service:	General service with tight shut-off.

**E Non-tight metal seat**

Seat:	Cobalt based alloy
Temp. Range:	50 °C... +425 °C / -58 °F ...+800 °F
Service:	Extremely erosive applications, non-tight.
NOTE !	Flow direction is reversed.

**1S 2-way tight metal seat**


Seat:	316 SS + Cobalt based hard facing, sizes 1" - 32" / DN 25 - 800
Spring:	Inconel 625
Seat seal:	Viton GF
Temp. range:	-30 °C... +200 °C / -22 °F ...+392 °F
Service:	General

**A High temp. metal seat**

Seat:	A: SS 316 + Cobalt based hard facing A1: SS 316 + CrC facing (with K segment)
Spring:	Inconel 625
Seat seal:	Graphite
Temp. range:	-50 °C... +425 °C, -58 °F... +800 °F
Service:	General service
Size:	NPS 2" - 10" / DN 50 - 250:
Note:	Available with model code A only (11. sign)


**CONSTRUCTION OPTIONS**

**Low C<sub>v</sub> trims**



Reduced C<sub>v</sub> trims are available on the 1" valve to control very low flows with high accuracy. The narrow orifice is a selfflushing design because the trim orifice is continually increasing.


**Q-trim valve trim for cavitation/noise abatement**



Liquid cavitation and aerodynamic noise problems can be solved with the patented Q-Trim valve trim. This design employs the two well-known principles of dividing the pressure drop into a series of small pressure drops and of separating the flow stream into many small jet streams. The use of these two



principles combined with the rotation of the attenuator elements provides a combination of cavitation/noise abatement with high rangeability, high capacity and the capability to handle impure fluids.

**Erosion resistant version**





This heavy duty erosion resistant design handles contaminated flows and abrasive media at a favorable cost/useable life ratio. The seat is machined from cobalt chromium alloy and the seat design is changed from normal to reverse flow for maximum abrasion resistance. This version should not be used for isolation service since the seat is not in contact with the segment.


**BODY PRESSURE RATINGS**

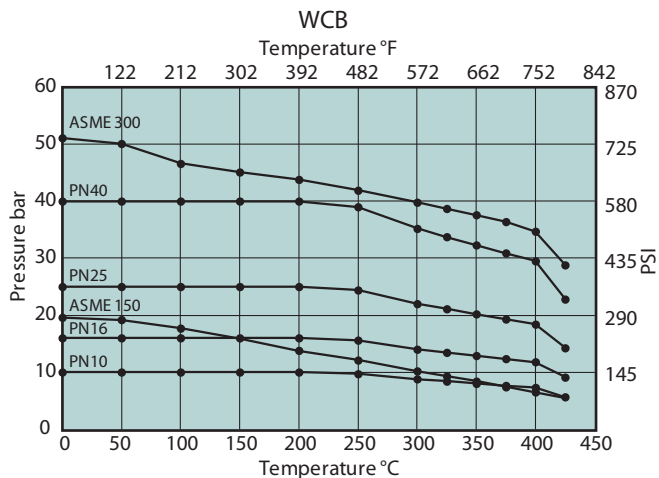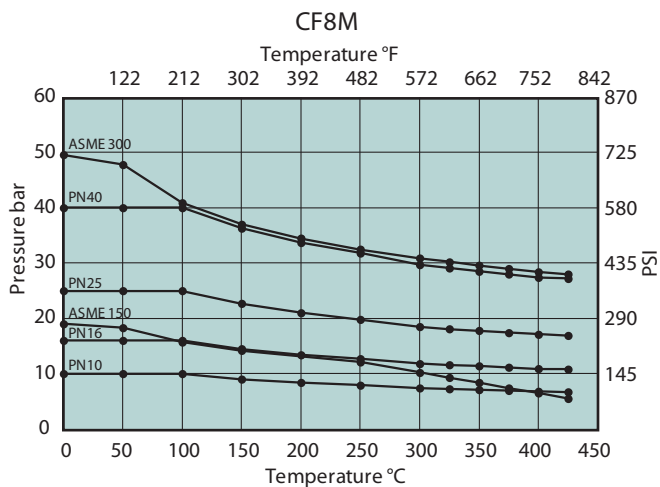


**Maximum operating pressure differential in shut-off service**

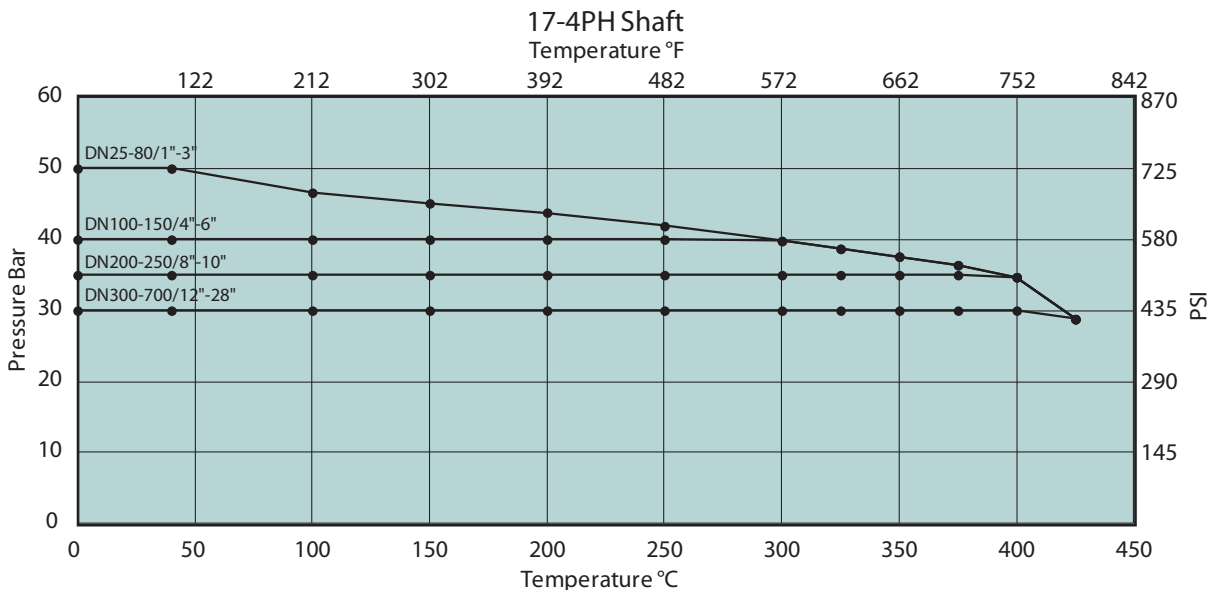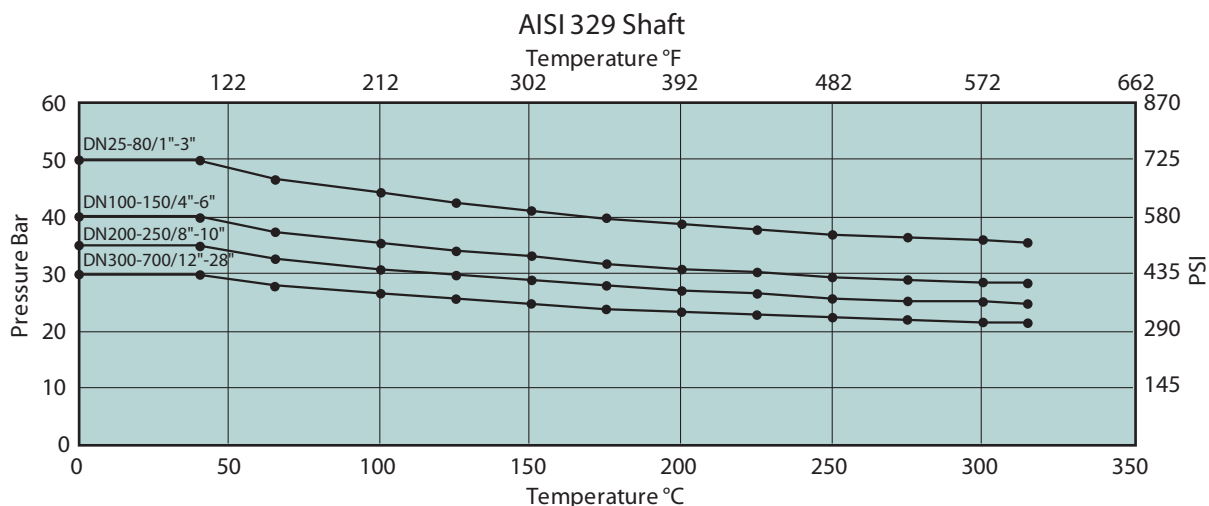


Max operating pressure differential in control service, RE  
opening range 0 %-70 %

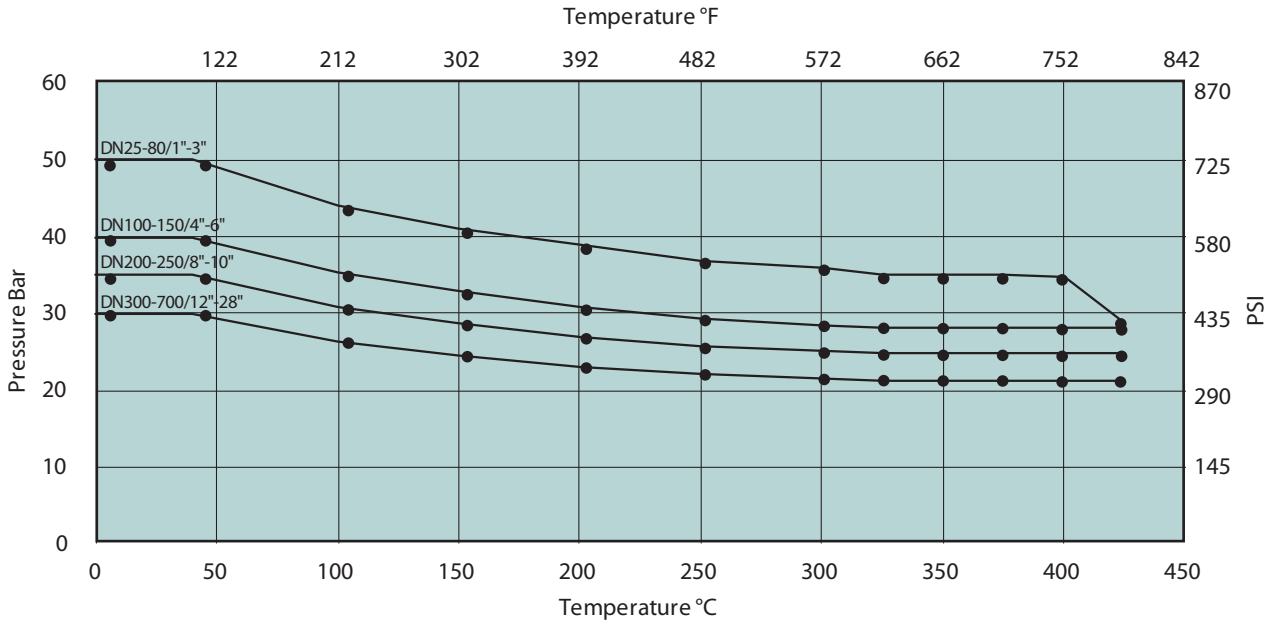


Max operating pressure differential in control service,  
RE opening range 70 %-100 %

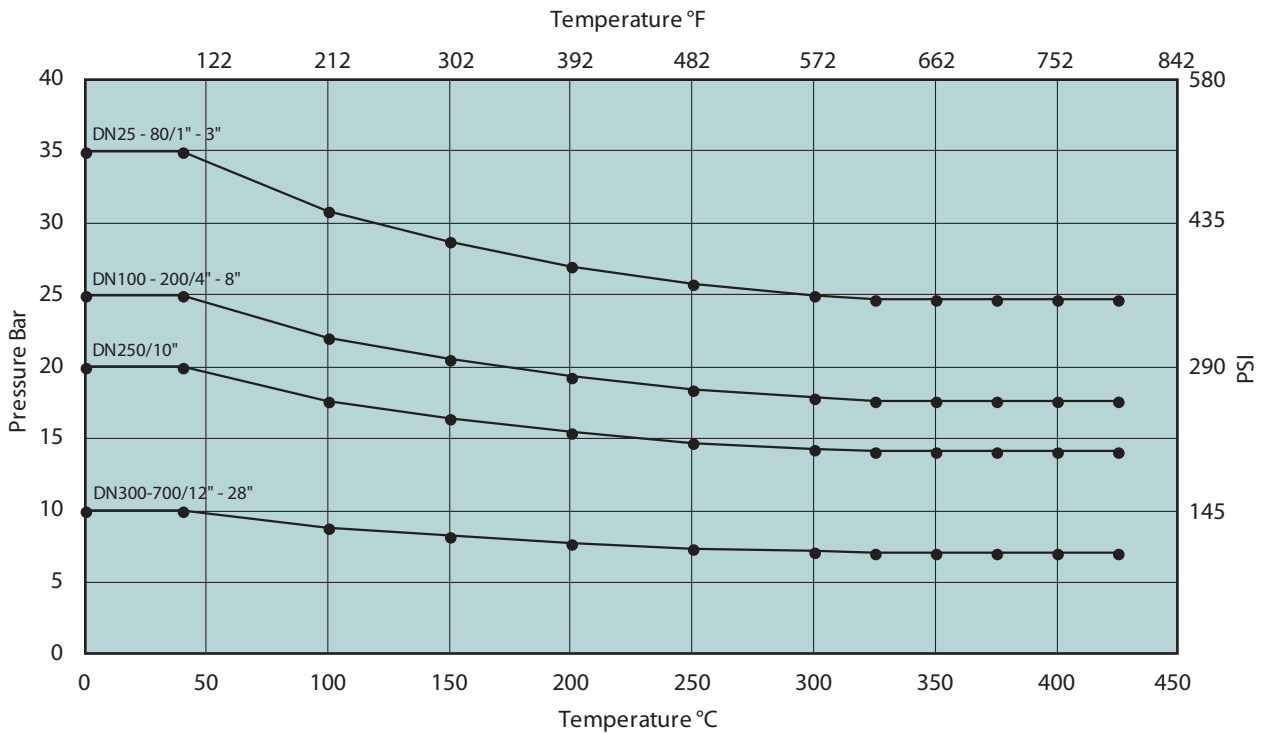


Max operating pressure differential in control service,  
Q-RE opening range 0 %- 30 %

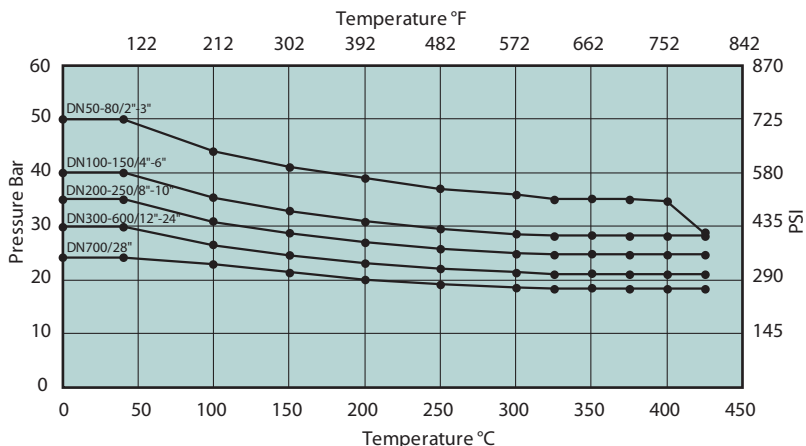

Max operating pressure differential in control service,  
Q-RE opening range 30 %- 60 %

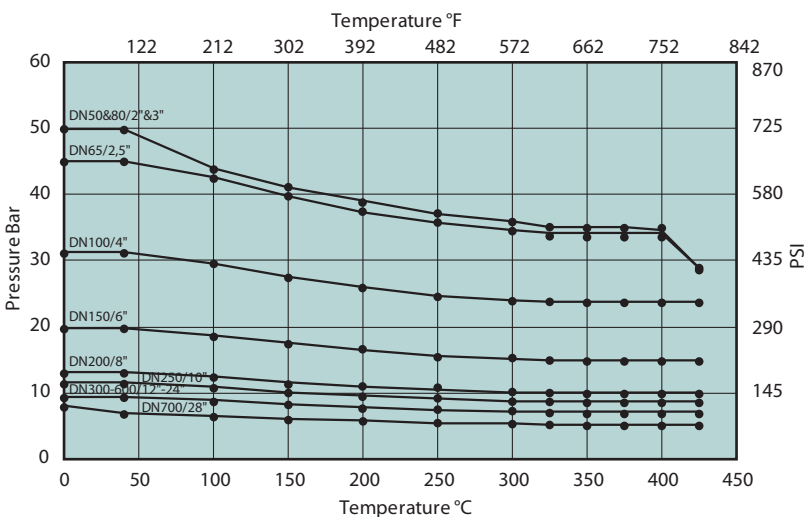

Max operating pressure differential in control service,  
Q-RE opening range 60 %-100 %

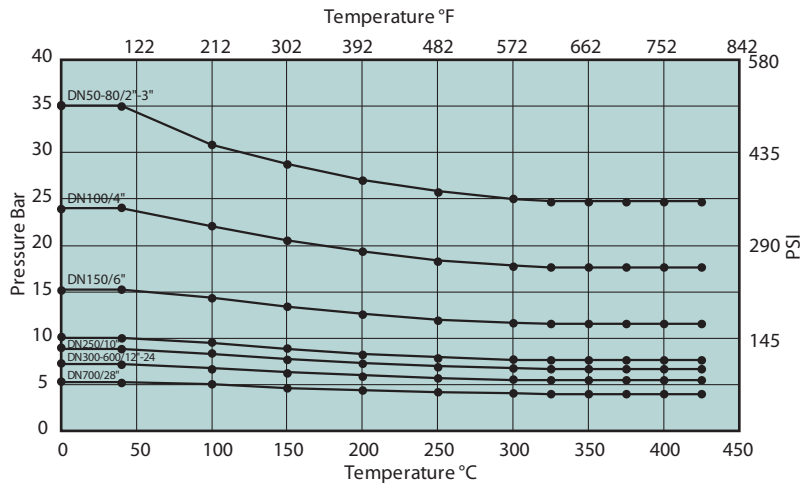

Note:

- 1) RE-valves are not recommended for applications with high on-off cycling rate. X- or L-series valves should be used in these cases.
- 2) Please observe body rating for material in question when determining maximum allowable shut-off pressure differential.

Given maximum allowable throttling differential pressures are based on mechanical strength of the parts only. Nelprof analysis determines actual throttling dp capability, taking into account trim velocity, exit velocity, noise and cavitation.

**SELECTION OF STANDARD ACTUATORS, QUADRA POWR**

VALVE SIZE inch	ACTUATOR SIZE	SPRING RATE psi	MAX SHUT-OFF DP psi RE, Q-RE	MAX CONTROL DP psi RE	MAX CONTROL DP psi Q-RE	ND Intelligent Valve Controller Recommended model	NP Pneumatic Positioner Recommended model
1	QP1C	60	727	509	507	ND 9103	NP 729
1 1/2	QP1C	60	727	509	507	ND 9103	NP 729
2	QP1C	60	727	509	507	ND 9103	NP 729
3	QP1C	60	320	320	319	ND 9103	NP 729
3	QP2B	41	509	509	507	ND 9103	NP 729
3	QP2C	60	727	509	507	ND 9103	NP 729
3	QP2D	80	727	509	507	ND 9103	NP 729
4	QP2C	60	509	364	261	ND 9103	NP 729
4	QP2D	80	582	364	261	ND 9103	NP 729
4	QP3B	41	582	364	261	ND 9103	NP 724
4	QP3C	60	582	364	261	ND 9103	NP 724
6	QP3B	41	320	320	261	ND 9103	NP 724
6	QP3C	60	407	364	261	ND 9103	NP 724
6	QP3D	80	582	364	261	ND 9103	NP 724
6	QP4B	41	582	364	261	ND 9106	NP 724
6	QP4C	60	582	364	261	ND 9106	NP 724
8	QP3C	60	233	233	217	ND 9103	NP 724
8	QP4B	41	407	364	217	ND 9106	NP 724
8	QP4C	60	509	364	217	ND 9106	NP 724
8	QP4D	80	509	364	217	ND 9106	NP 724
10	QP4C	60	291	291	145	ND 9106	NP 724
10	QP4D	80	407	291	145	ND 9106	NP 724
10	QP5B	41	465	291	145	ND 9106	NP 726
10	QP5C	60	509	291	145	ND 9106	NP 726
12	QP5B	41	218	145	116	ND 9106	NP 726
12	QP5C	60	364	145	116	ND 9106	NP 726
12	QP5D	80	436	145	116	ND 9106	NP 726
14	QP5C	60	174	145	116	ND 9106	NP 726
14	QP5D	80	247	145	116	ND 9106	NP 726
16	QP5C	60	116	116	116	ND 9106	NP 726
16	QP5D	80	189	145	116	ND 9106	NP 726


**NOTES**

- 1) Maximum shut-off differential pressures for valves are given considering clean media. Safety margins between 10 % - 25 % are typically recommended for cases where media is sticky or has tendency to built-up inside the valve.
- 2) Selection is based on supply pressures as per relevant spring rate.
- 3) Maximum shut-off differential pressures are given at ambient temperature, see curves on page 5.
- 4) Maximum control differential pressures must not be based on values in this table only. *Nelprof* calculation, taking into account noise level, inlet/outlet velocity, existence of cavitation, and actuator load factors must be observed when determining valves' differential pressure capability.



**DIMENSIONS**

**RE1-Series**

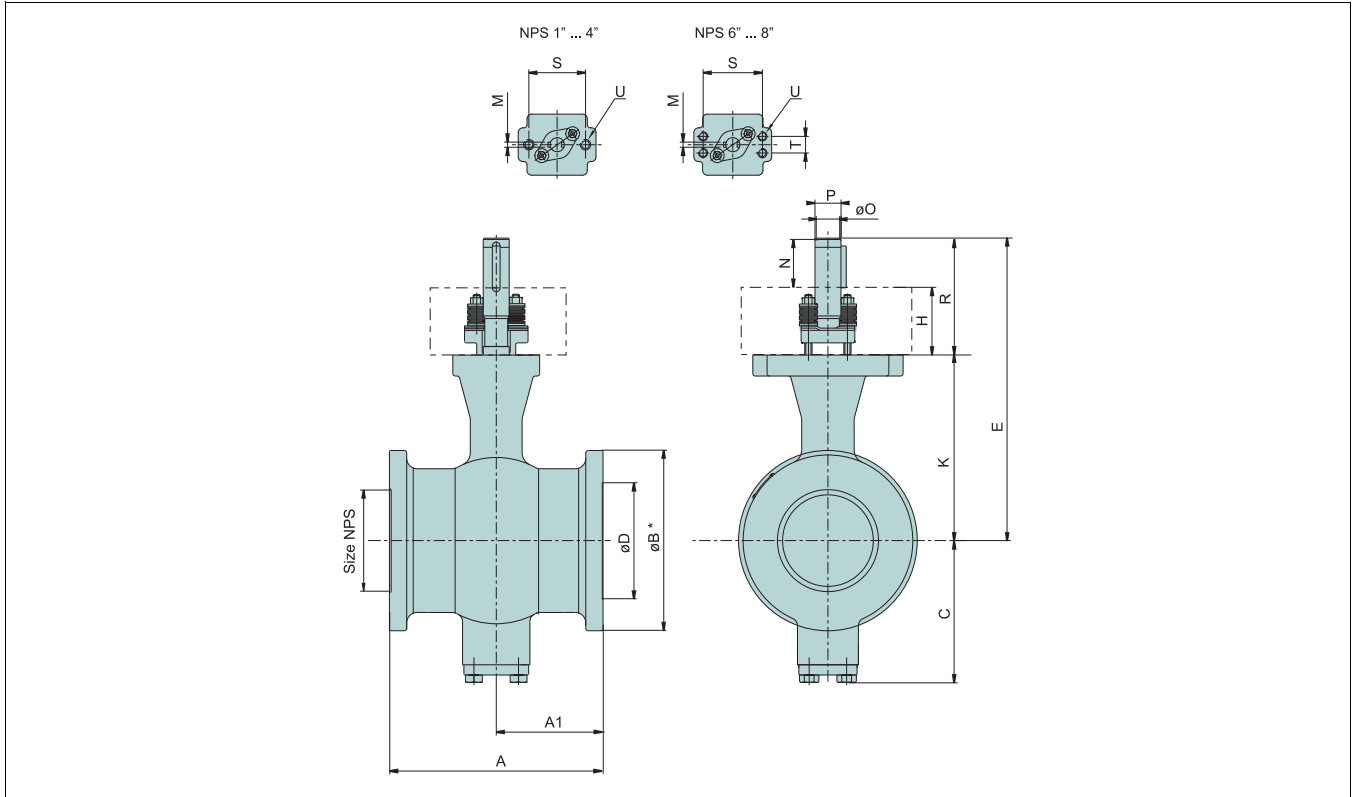


**RE1-Series**

INCH	DN	Dimensions (inch)										Shaft Dimensions (inch) (RE_A Keyed Shaft)						Flange Dimensions & Weights	
		A1	A	C	øD	K	S	T	U	L	H	E	R	øO	M	P	N	øB	lbs
1	25	2.01	4.02	2.2	1.3	7.17	2.76	-	M10	0.61	3.15	8.15	4.13	0.59	0.19	0.67	0.98	2.52	9
1.5	40	2.24	4.49	2.56	1.93	7.42	2.76	-	M10	0.61	3.15	8.41	4.13	0.59	0.19	0.67	0.98	3.23	11
2	50	2.44	4.88	3.58	2.36	7.85	2.76	-	M10	0.61	3.15	8.84	4.13	0.59	0.19	0.67	0.98	3.94	18
3	80	3.25	6.5	4.25	3.5	9.13	3.54	-	M12	0.63	3.54	10.51	4.92	0.79	0.19	0.87	1.38	5.12	31
4	100	3.82	7.64	4.72	4.45	9.49	3.54	-	M12	0.63	3.54	10.87	4.92	0.79	0.19	0.87	1.38	6.22	40
6	150	4.51	9.02	6.85	6.46	11.42	4.33	1.26	M12	0.87	3.54	13.19	5.31	0.98	0.25	1.09	1.81	8.5	84
8	200	4.39	9.57	7.91	8.07	13.58	5.12	1.26	M12	0.87	4.33	15.55	6.3	1.18	0.25	1.3	2.01	10.55	143

**RE1-Series**

INCH	DN	Dimensions (mm)										Shaft Dimensions (mm) (RE_A Keyed Shaft)						Flange Dimensions & Weights	
		A1	A	C	øD	K	S	T	U	L	H	E	R	øO	M	P	N	øB	kg
1	25	51	102	56	33	182	70	-	M10	15.5	80	207	105	15	4.76	17	25	64	4
1.5	40	57	114	65	49	188.5	70	-	M10	15.5	80	213.5	105	15	4.76	17	25	82	5
2	50	62	124	91	60	199.5	70	-	M10	15.5	80	224.5	105	15	4.76	17	25	100	8
3	80	82.5	165	108	89	232	90	-	M12	16	90	267	125	20	4.76	22.2	35	130	14
4	100	97	194	120	113	241	90	-	M12	16	90	276	125	20	4.76	22.2	35	158	18
6	150	114.5	229	174	164	290	110	32	M12	22	90	335	135	25	6.35	27.8	46	216	38
8	200	111.5	243	201	205	345	130	32	M12	22	110	395	160	30	6.35	32.9	51	268	65

Series RE

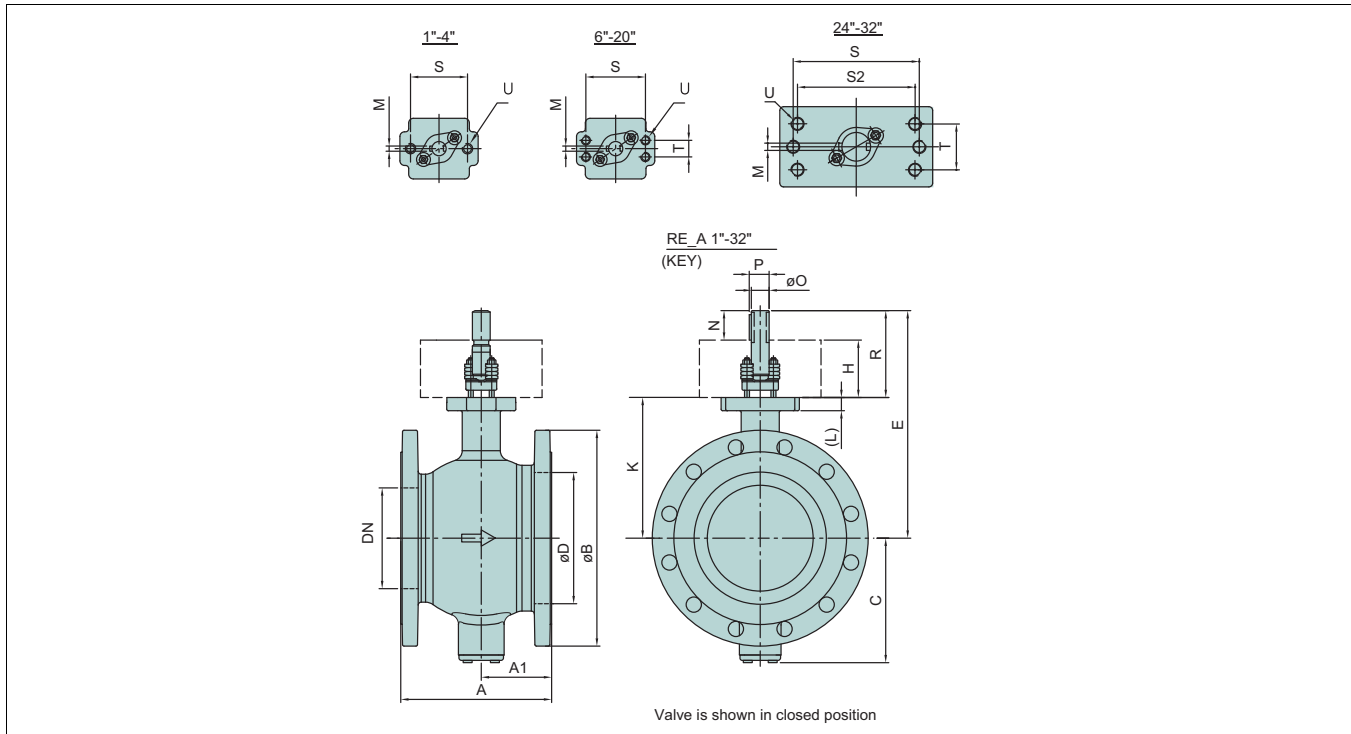

Series RE

INCH	DN	Dimensions (inch)											Shaft Dimensions (inch) (RE A Keyed Shaft)						Flange Dimensions & Weights			
		A1	A	C	øD	K	S/S2	T	U	L	H	E	R	øO	M	P	N	ASME 150		ASME 300		
		øB	lbs	øB	lbs																	
1	25	2.01	4.02	2.2	1.29/1.49 <sup>1)</sup>	7.17	2.76	-	M10	0.61	3.15	8.15	4.13	0.59	0.19	0.67	0.98	4.25	8	4.88	11	
1.5	40	2.24	4.49	2.56	1.93	7.42	2.76	-	M10	0.61	3.15	8.41	4.13	0.59	0.19	0.67	0.98	5	11	6.1	17	
2	50	2.44	4.88	3.58	2.36	7.85	2.76	-	M10	0.61	3.15	8.84	4.13	0.59	0.19	0.67	0.98	5.98	17	6.5	21	
2.5	65	2.85	5.71	3.82	2.95	8.07	2.76	-	M10	0.61	3.15	9.09	4.13	0.59	0.19	0.67	0.98	7.28	29	7.28	29	
3	80	3.25	6.5	4.25	3.5	9.13	3.54	-	M12	0.63	3.54	10.51	4.92	0.79	0.19	0.87	1.38	7.52	31	8.27	42	
4	100	3.82	7.64	4.72	4.45	9.49	3.54	-	M12	0.63	3.54	10.87	4.92	0.79	0.19	0.87	1.38	9.02	47	10	64	
6	150	4.51	9.02	6.85	6.46	11.42	4.33	1.26	M12	0.87	3.54	13.19	5.31	0.98	0.25	1.09	1.81	10.98	86	12.52	119	
8	200	4.39	9.57	7.91	8.07	13.58	5.12	1.26	M12	0.87	4.33	15.55	6.3	1.18	0.25	1.3	2.01	13.5	137	15	183	
10	250	5.45	11.69	9.88	10.2	15.24	5.12	1.26	M12	1.02	4.33	17.52	6.61	1.38	0.38	1.54	2.28	15.98	201	17.72	306	
12	300	6.06	13.31	10.59	11.81	17.52	6.3	1.57	M16	1.02	4.72	19.09	7.4	1.57	0.38	1.74	2.68	19.02	313	20.47	438	
14	350	6.89	15.75	12.24	13.78	19.13	6.3	1.57	M16	1.14	4.72	20.2	7.87	1.77	0.5	1.98	3.15	21.02	447	22.99	625	
16	400	6.3	15.75	13.9	15.75	21.77	6.3	2.17	M20	1.14	5.51	22.99	9.06	1.97	0.5	2.19	3.54	23.5	581	25.51	781	
20	500	9.17	20	16.54	19.69	24.33	9.06	3.54	M27	1.57	7.09	28.62	11.5	2.76	0.75	3.08	4.69	27.52	1210	30.51	1320	
24	600	13.98	24.02	19.29	23.62	27.72	13/12	4.72	M30	1.57	8.66	32.99	13.94	2.95	0.75	3.22	5.28	32.09	2128	36.02	2563	
28	700	11.61	27.95	21.22	27.56	30.24	13/12	4.72	M30	2.17	8.66	35.98	14.41	3.35	0.88	3.75	5.75	36.42	2748	40.75	3327	
32	800	14.96	33.07	25	31.5	34.31	13/12	4.72	M30	2.17	8.66	41.42	15.83	4.13	1	4.51	7.09	41.73	4070	45.28	-	


<sup>1)</sup> 1.49" (38 mm) for low capacity segment (eg C005-RE)

Series RE

INCH	DN	Dimensions (mm)											Shaft Dimensions (mm) (RE A Keyed Shaft)						Flange Dimensions & Weights			
		A1	A	C	øD	K	S/S2	T	U	L	H	E	R	øO	M	P	N	ASME 150		ASME 300		
		øB	kg	øB	kg																	
1	25	51	102	56	33/38 <sup>1)</sup>	182	70	-	M10	15.5	80	207	105	15	4.76	17	25	108	3.6	124	4.9	
1.5	40	57	114	65	49	188.5	70	-	M10	15.5	80	213.5	105	15	4.76	17	25	127	4.6	155	7.5	
2	50	62	124	91	60	199.5	70	-	M10	15.5	80	224.5	105	15	4.76	17	25	152	7.4	165	9.5	
2.5	65	72.5	145	97	75	205	70	-	M10	15.5	80	231	105	15	4.76	17	25	185	13	185	13	
3	80	82.5	165	108	89	232	90	-	M12	16	90	267	125	20	4.76	22.2	35	191	14	210	19	
4	100	97	194	120	113	241	90	-	M12	16	90	276	125	20	4.76	22.2	35	229	21	254	29	
6	150	114.5	229	174	164	290	110	32	M12	22	90	335	135	25	6.35	27.8	46	279	39	318	54	
8	200	111.5	243	201	205	345	130	32	M12	22	110	395	160	30	6.35	32.9	51	343	62	381	83	
10	250	138.5	297	251	259	387	130	32	M12	26	110	445	168	35	9.53	39.1	58	406	91	450	139	
12	300	154	338	269	300	445	160	40	M16	26	120	485	188	40	9.53	44.2	68	483	142	520	199	
14	350	175	400	311	350	486	160	40	M16	29	120	513	200	45	12.7	50.4	80	534	203	584	284	
16	400	160	400	353	400	553	160	55	M20	29	140	584	230	50	12.7	55.9	90	597	264	648	355	
20	500	233	508	420	500	618	230	90	M27	40	180	727	292	70	19.05	78.2	119	699	550	775	600	
24	600	355	610	490	600	704	330/304.7	120	M30	40	220	838	354	75	19.05	81.9	134	815	967	915	1165	
28	700	295	710	539	700	768	330/304.7	120	M30	55	220	914	366	85	22.23	95.3	146	925	1249	1035	1512	
32	800	380	840	635	800	871.5	330/304.7	120	M30	55	220	1052	402	105	25.4	114.5	180	1060	1850	1150	-	

<sup>1)</sup> 1.49" (38 mm) for low capacity segment (eg C005-RE)

RE/RE1-QPX

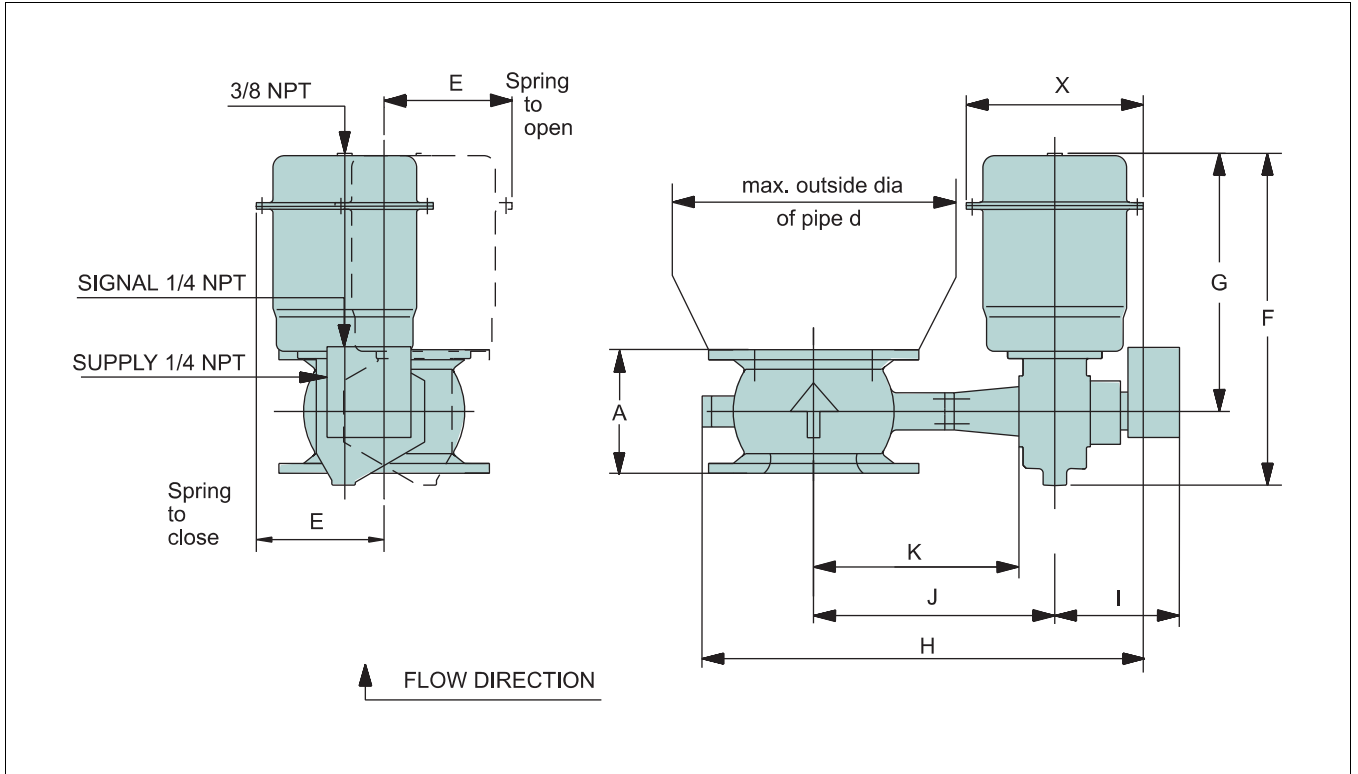


RE/RE1-QPX

INCH	DN	QPX Size	Dimensions (inch)										Weight 150# (lbs)	Weight 300# (lbs)	Weight RE1 (lbs)
			A	E	F	G	H	I	J	K	X	Pipe d			
1	25	1	4.02	5.6	15.04	13	15.28	6.3	8.86	7.17	8.39	9.06	42	46	33
1.5	40	1	4.49	5.6	15.04	13	15.91	6.3	9.14	7.45	8.39	9.65	44	51	38
2	50	1	4.89	5.6	15.04	13	17.37	6.3	9.57	7.88	8.39	10.44	49	55	42
3	80	2	6.5	5.6	15.04	13	19.93	6.78	11.19	9.14	8.39	13	84	95	73
4	100	2	7.64	6.15	18.9	15.32	20.75	6.78	11.54	9.49	8.98	13.78	99	117	82
6	150	2	9.02	6.15	18.9	15.32	24.81	7.52	13.47	11.42	8.98	17.72	139	172	126
		3	9.02	7.49	22.25	17.56	25.87	8.43	13.63	11.42	10.79	16.15	172	205	157
8	200	3	9.57	7.49	22.25	17.56	29.1	7.52	15.79	13.59	9.73	20.48	223	269	216
		4	9.57	8.98	25	19.49	30.24	8.43	16.03	13.59	12.6	19.1	267	313	260
10	250	4	11.7	8.98	25	19.49	33.86	8.43	17.68	15.24	12.6	22.45	330	436	-
		5	11.7	10.87	30.24	23.94	35.67	9.57	18.27	15.24	15.04	21.26	451	557	-
12	300	5	13.31	10.87	30.24	23.94	38.67	8.43	20.56	17.52	15.04	25.6	564	689	-
14	350	5	15.75	10.87	30.24	23.94	41.93	9.57	22.17	19.14	15.04	28.94	698	876	-
16	400	5	15.75	10.87	30.24	23.94	46.23	9.57	24.81	21.78	15.04	34.26	832	1034	-

RE/RE1-QPX

INCH	DN	QPX Size	Dimensions (mm)										Weight 150# (lbs)	Weight 300# (lbs)	Weight RE1 (lbs)
			A	E	F	G	H	I	J	K	X	Pipe d			
1	25	1	102	142	382	330	388	160	225	182	213	230	19	20.5	15
1.5	40	1	114	142	382	330	404	160	232	189	213	245	20	23	17
2	50	1	124	142	382	330	441	160	243	200	213	265	22	25	19
3	80	2	165	142	382	330	506	172	284	232	213	330	38	43	33
4	100	2	194	156	480	389	527	172	293	241	228	350	45	53	37
6	150	2	229	156	480	389	630	191	342	290	228	450	63	78	57
6	150	3	229	190	565	446	657	214	346	290	274	410	78	93	71
8	200	3	243	190	565	446	739	191	401	345	247	520	101	122	98
8	200	4	243	228	635	495	768	214	407	345	320	485	121	142	118
10	250	4	297	228	635	495	860	214	449	387	320	570	150	198	-
10	250	5	297	276	768	608	906	243	464	387	382	540	205	253	-
12	300	5	338	276	768	608	982	214	522	445	382	650	256	313	-
14	350	5	400	276	768	608	1065	243	563	486	382	735	317	398	-
16	400	5	400	276	768	608	1174	243	630	553	382	870	378	470	-

RE-B1C

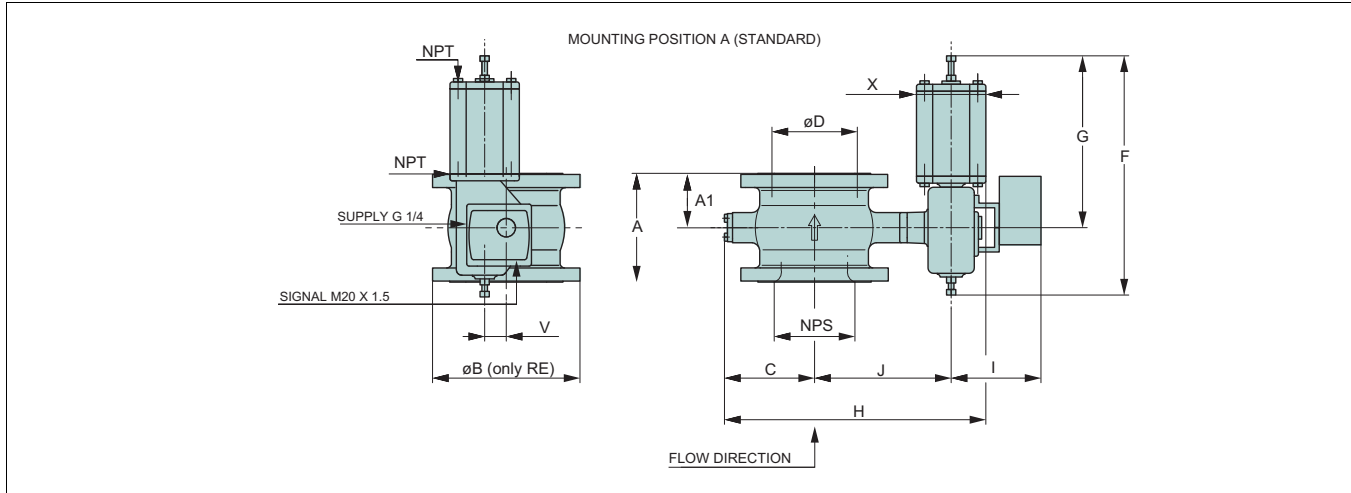

RE-B1C

INCH	DN	B1C Size	Dimensions (inch)										NPT	REC_ASME 150		REC_ASME 300		RE1
			A	C	øD	F	G	X	V	J	H	lmax		øB	lbs	øB	lbs	
1	25	6	4.02	2.21	1.29/ 1.49 <sup>1)</sup>	15.75	10.24	3.55	1.42	9.45	13.43	12.21	1/4	108	27	124	27	18
1.5	40	6	4.49	2.56	1.93	15.75	10.24	3.55	1.42	9.73	14.06	12.21	1/4	127	30	155	32	21
2	50	6	4.89	3.59	2.37	15.75	10.24	3.55	1.42	10.16	15.52	12.21	1/4	152	36	165	37	27
2.5	65	6	5.71	3.82	2.96	15.75	10.24	3.55	1.42	10.44	16.15	12.21	1/4	185	40	-	-	-
3	80	6	6.5	4.26	3.51	15.75	10.24	3.55	1.42	11.42	17.45	12.21	1/4	191	47	210	58	40
4	100	6	7.64	4.73	4.45	15.75	10.24	3.55	1.42	11.78	18.27	12.21	1/4	229	63	254	76	49
6	150	6	9.02	6.86	6.46	15.75	10.24	3.55	1.42	13.71	22.33	12.21	1/4	279	102	318	113	97
		9				17.92	12.41	4.34	1.7	13.75	22.76	12.01	1/4		115		126	110
		11				21.26	14.77	5.32	2.56	13.98	23.51	12.21	3/8		130		141	121
8	200	6	9.57	7.92	8.08	15.75	10.24	3.55	1.42	15.87	25.56	12.21	1/4	343	152	381	198	147
		9				17.92	12.41	4.34	1.7	15.91	25.99	12.01	1/4		165		212	156
		11				21.26	14.77	5.32	2.01	16.15	26.74	12.21	3/8		181		227	176
10	250	9	11.7	9.89	10.2	17.92	12.41	4.34	1.7	17.56	29.61	12.21	1/4	406	229	450	335	-
		11				21.26	14.77	5.32	2.01	17.8	30.36	12.21	3/8		251		350	-
		13				25	17.52	6.89	2.56	18.43	31.78	12.8	3/8		306		383	-
		17				30.32	21.46	8.47	3.08	19.02	33.15	13.39	1/2		357		434	-
12	300	11	13.31	10.6	11.82	21.26	14.77	5.32	2.01	18.98	32.25	12.21	3/8	483	357	520	482	-
		13				25	17.52	6.89	2.56	19.61	33.67	12.8	3/8		390		515	-
		17				30.32	21.46	8.47	3.08	20.2	35.04	13.39	1/2		440		566	-
14	350	13	15.75	12.25	13.78	25	17.52	6.89	2.56	20.24	35.95	12.8	3/8	534	524	584	702	-
		17				30.32	21.46	8.47	3.08	20.83	37.29	13.39	1/2		575		753	-
		20				33.08	22.64	8.47	3.82	21.58	38.08	13.98	1/2		616		795	-
		17				30.32	21.46	8.47	3.08	23.23	41.38	13.39	1/2		711		911	-
16	400	20	15.75	13.9	15.75	33.08	22.64	8.47	3.82	23.98	42.17	13.98	1/2	597	753	648	953	-
		25				42.33	28.55	10.44	4.77	24.89	44.02	15.36	1/2		880		1081	-
		20				42.33	28.55	10.44	4.77	28.47	50.63	15.36	1/2		700		1499	775
24	600	25	610	497	600	42.33	28.55	10.44	4.77	33.15	58.98	15.36	1/2	815	2420	915	2856	-
		32				53.94	36.23	15.56	6.03	34.61	61.93	16.93	3/4		2695		3131	-
28	700	32	710	547	700	53.94	36.23	15.56	6.03	37.17	66.38	16.93	3/4	925	3314	1035	3894	-
		40				65.75	45.28	19.89	7.64	39.1	69.14	17.72	3/4		3732		4312	-


<sup>1)</sup> 1.49" (38 mm) for low capacity segment (eg C005-RE)

## RE-B1C

INCH	DN	B1C Size	Dimensions (mm)										NPT	REC_ASME 150		REC_ASME 300		RE1	
			A	C	øD	F	G	X	V	J	H	Imax		øB	kg	øB	kg	kg	
1	25	6	102	56	33/38 <sup>1)</sup>	400	260	90	36	240	341	310	1/4	108	11.9	124	11.9	8.2	
1.5	40	6	114	65	49	400	260	90	36	247	357	310	1/4	127	13.5	155	14.3	9.5	
2	50	6	124	91	60	400	260	90	36	258	394	310	1/4	152	16.1	165	16.8	12	
2.5	65	6	145	97	75	400	260	90	36	265	410	310	1/4	185	18	-	-	-	
3	80	6	165	108	89	400	260	90	36	290	443	310	1/4	191	21	210	26	18	
4	100	6	194	120	113	400	260	90	36	299	464	310	1/4	229	28.3	254	34.3	22	
6	150	6	229	174	164	400	260	90	36	348	567	310	1/4	279	46.3	318	51.3	40	
		9				455	315	110	43	349	578	305	1/4		52			57	50
		11				540	375	135	65	355	597	310	3/8		59			64	55
8	200	6	243	201	205	400	260	90	36	403	649	310	1/4	343	69	381	90	67	
		9				455	315	110	43	404	660	305	1/4		75			96	71
		11				540	375	135	51	410	679	310	3/8		82			103	80
10	250	9	297	251	259	455	315	110	43	446	752	310	1/4	406	104	450	152	-	
		11				540	375	135	51	452	771	310	3/8		114			159	-
		13				635	445	175	65	468	807	325	3/8		139			174	-
		17				770	545	215	78	483	842	340	1/2		162			197	-
12	300	11	338	269	300	540	375	135	51	482	819	310	3/8	483	162	520	219	-	
		13				635	445	175	65	498	855	325	3/8		177			234	-
		17				770	545	215	78	513	890	340	1/2		200			257	-
14	350	13	400	311	350	635	445	175	65	514	913	325	3/8	534	238	584	319	-	
		17				770	545	215	78	529	947	340	1/2		261			342	-
		20				840	575	215	97	548	967	355	1/2		280			361	-
16	400	17	400	353	400	770	545	215	78	590	1051	340	1/2	597	323	648	414	-	
		20				840	575	215	97	609	1071	355	1/2		342			433	-
		25				1075	725	265	121	632	1118	390	1/2		400			491	-
20	500	25	508	430	500	1075	725	265	121	723	1286	390	1/2	700	681	775	731	-	
24	600	25	610	497	600	1075	725	265	121	842	1498	390	1/2	815	1100	915	1298	-	
		32				1370	920	395	153	879	1573	430	3/4		1225			1423	-
28	700	32	710	547	700	1370	920	395	153	944	1686	430	3/4	925	1506	1035	1770	-	
		40				1670	1150	505	194	993	1756	450	3/4		1696			1960	-

<sup>1)</sup> 1.49" (38 mm) for low capacity segment (eg C005-RE)

RE-B1J / B1JA

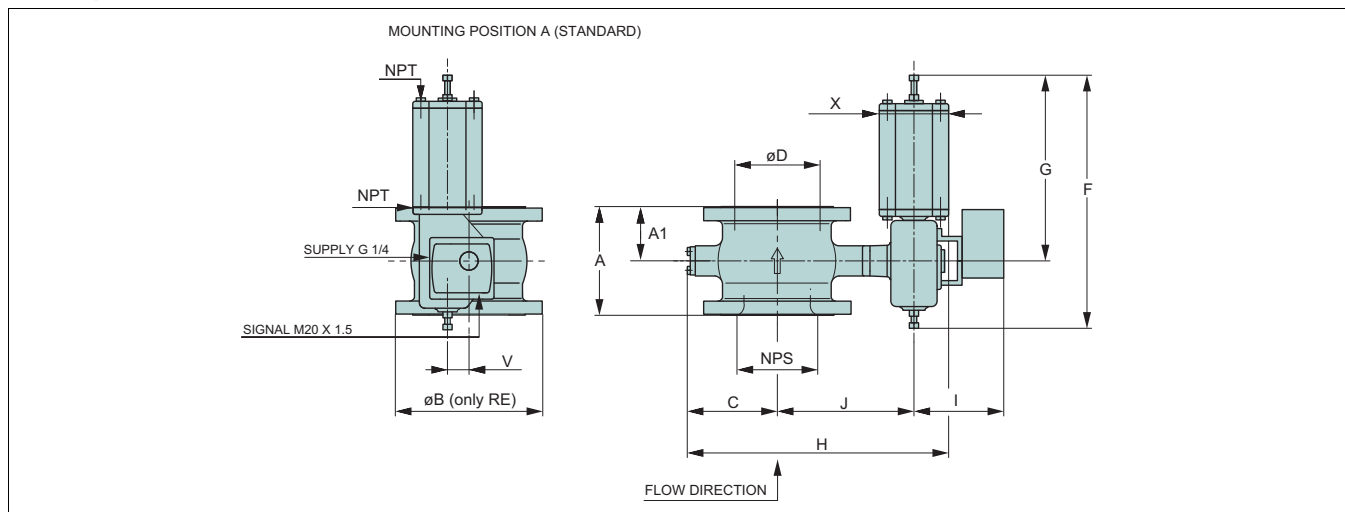

RE-B1J / B1JA

INCH	DN	B1J / B1JA Size	Dimensions (inch)										NPT	REC_ASME 150		REC_ASME 300		RE1
			A	C	øD	F	G	X	V	J	H	Imax		øB	lbs	øB	lbs	
1	25	6	4.02	2.21	1.29/1.49 <sup>1)</sup>	19.1	14.49	4.34	1.42	9.41	13.86	12.01	3/8	4.26	47	4.89	47	38
		22.05				16.54	5.32	1.7	9.45	14.34	12.01	3/8	55		55		47	
1.5	40	6	4.49	2.56	1.93	19.1	14.49	4.34	1.42	9.69	14.49	12.01	3/8	5	51	6.11	53	42
		22.05				16.54	5.32	1.7	9.73	14.97	12.01	3/8	60		62		51	
2	50	6	4.89	3.59	2.37	19.1	14.49	4.34	1.42	10.12	15.91	12.01	3/8	5.99	55	6.5	58	44
		22.05				16.54	5.32	1.7	10.16	16.38	12.01	3/8	64		66		55	
2.5	65	6	5.71	3.82	2.96	19.1	14.49	4.34	1.42	10.4	16.46	12.01	3/8	7.29	58	-	-	-
		22.05				16.54	5.32	1.7	10.44	16.93	12.01	3/8	66		-		-	
3	80	6	6.5	4.26	3.51	19.1	14.49	4.34	1.42	11.38	17.88	12.01	3/8	7.52	66	8.27	77	58
		22.05				16.54	5.32	1.7	11.42	18.35	12.01	3/8	75		86		66	
4	100	6	7.64	4.73	4.45	19.1	14.49	4.34	1.42	11.74	18.71	12.01	3/8	9.02	84	10	95	69
		22.05				16.54	5.32	1.7	11.78	19.18	12.01	3/8	93		104		77	
6	150	6	9.02	6.86	6.46	19.1	14.49	4.34	1.42	13.67	22.76	12.01	3/8	10.99	121	12.52	135	113
		22.05				16.54	5.32	1.7	13.71	23.23	12.01	3/8	130		143		121	
		25.6				19.3	6.89	2.01	13.98	24.3	8.86	3/8	159		170		154	
8	200	6	9.57	7.92	8.08	19.1	14.49	4.34	1.42	15.87	26.03	12.01	3/8	13.51	172	15	218	165
		22.05				16.54	5.32	1.7	15.91	26.5	12.01	3/8	181		227		176	
		25.6				19.3	6.89	2.01	16.15	27.56	12.21	3/8	209		256		209	
		31.5				24.41	8.47	2.56	16.78	28.98	9.26	1/2	271		317		264	
10	250	10	11.7	9.89	10.2	25.6	19.3	6.89	2.01	17.8	31.11	12.21	3/8	15.99	273	17.72	379	-
		31.5				24.41	8.47	2.56	18.43	32.56	12.8	1/2	319		440		-	
		38.98				29.93	10.44	3.08	19.02	34.14	13.39	1/2	480		557		-	
12	300	12	13.31	10.6	11.82	31.5	24.41	8.47	2.56	19.61	34.45	12.8	1/2	19.02	447	20.48	572	-
		38.98				29.93	10.44	3.08	20.2	36.07	13.39	1/2	542		667		-	
		47.25				36.82	15.56	3.82	21.03	39.38	10.63	3/4	707		832		-	
14	350	16	15.75	12.25	13.78	38.98	29.93	10.44	3.08	20.83	38.31	13.39	1/2	21.03	676	23	854	-
		47.25				36.82	15.56	3.82	21.58	41.62	13.98	3/4	841		1019		-	
16	400	20	15.75	13.9	15.75	47.25	36.82	15.56	3.82	23.98	45.71	13.98	3/4	23.51	977	25.52	1177	-
		60.24				47.25	19.89	4.77	24.89	48.75	15.36	3/4	1364		1565		-	
20	500	25	20	16.93	19.69	60.24	47.25	19.89	4.77	28.47	55.36	15.36	3/4	27.52	1980	30.52	2090	-
24	600	32	24.02	19.57	23.63	74.22	56.5	21.26	6.03	34.61	62.09	16.82	1	32.09	3608	36.03	4044	-
28	700	32	27.96	21.54	27.56	74.22	56.5	21.26	6.03	37.13	66.58	16.82	1	36.42	4227	40.75	4807	-

<sup>1)</sup>1.49" (38 mm) for low capacity segment (eg C005-RE)

## RE-B1J / B1JA

INCH	DN	B1J / B1JA Size	Dimensions (mm)										NPT	REC_ASME 150		REC_ASME 300		RE1
			A	C	øD	F	G	X	V	J	H	Imax		øB	kg	øB	kg	
1	25	6	102	56	33/38 <sup>1)</sup>	485	368	110	36	239	352	305	3/8	108	21	124	21	17
		8				560	420	135	43	240	364	305	3/8		25		25	21
1.5	40	6	114	65	49	485	368	110	36	246	368	305	3/8	127	23	155	24	19
		8				560	420	135	43	247	380	305	3/8		27		28	23
2	50	6	124	91	60	485	368	110	36	257	404	305	3/8	152	25	165	26	20
		8				560	420	135	43	258	416	305	3/8		29		30	25
2.5	65	6	145	97	75	485	368	110	36	264	418	305	3/8	185	26	-	-	-
		8				560	420	135	43	265	430	305	3/8		30		-	-
3	80	6	165	108	89	485	368	110	36	289	454	305	3/8	191	30	210	35	26
		8				560	420	135	43	290	466	305	3/8		34		39	30
4	100	6	194	120	113	485	368	110	36	298	475	305	3/8	229	38	254	43	31
		8				560	420	135	43	299	487	305	3/8		42		47	35
6	150	6	229	174	164	485	368	110	36	347	578	305	3/8	279	55	318	61	51
		8				560	420	135	43	348	590	305	3/8		59		65	55
		10				650	490	175	51	355	617	225	3/8		72		77	70
8	200	6	243	201	205	485	368	110	36	403	661	305	3/8	343	78	381	99	75
		8				560	420	135	43	404	673	305	3/8		82		103	80
		10				650	490	175	51	410	700	310	3/8		95		116	95
		12				800	620	215	65	426	736	235	1/2		123		144	120
10	250	10	297	251	259	650	490	175	51	452	790	310	3/8	406	124	450	172	-
		12				800	620	215	65	468	827	325	1/2		145		200	-
		16				990	760	265	78	483	867	340	1/2		218		253	-
12	300	12	338	269	300	800	620	215	65	498	875	325	1/2	483	203	520	260	-
		16				990	760	265	78	513	916	340	1/2		246		303	-
		20				1200	935	395	97	534	1000	270	3/4		321		378	-
14	350	16	400	311	350	990	760	265	78	529	973	340	1/2	534	307	584	388	-
		20				1200	935	395	97	548	1057	355	3/4		382		463	-
16	400	20	400	353	400	1200	935	395	97	609	1161	355	3/4	597	444	648	535	-
		25				1530	1200	505	121	632	1238	390	3/4		620		711	-
20	500	25	508	430	500	1530	1200	505	121	723	1406	390	3/4	699	900	775	950	-
24	600	32	610	497	600	1885	1435	540	153	879	1577	427	1	815	1640	915	1838	-
28	700	32	710	547	700	1885	1435	540	153	943	1691	427	1	925	1921	1035	2185	-

<sup>1)</sup> 1.49" (38 mm) for low capacity segment (eg C005-RE)

## HOW TO ORDER

Example:

1.	2.	3.	4.	5.	6.	7.	8.	9.	10.		11.
-	RE1	D	A	03	D	J	J	S	T	/	-

1. Sign	Trim codes
---	standard V-port (no sign)
Q-	Low noise and anti-cavitation trim (for 2" and larger)
C005-	Maximum Cv = 0.5 (for 1" only)
C015-	Maximum Cv = 1.5 (for 1" only)
C05-	Maximum Cv = 5.0 (for 1" only)
C15-	Maximum Cv = 15.0 (for 1" only)

2. Sign	Product series
RE1	Flangeless body, face-to-face acc. to ISA S75.04 and DIN/IEC 534 Part 3-2. (Available in sizes 1" - 8")
RE13	Flanged body, face-to-face acc. to ASME B16.10 (spool piece constr.) (Available in sizes 1" - 12")
RE	Flanged body, face-to-face acc. to ISA S75.04 and DIN/IEC Part 3-2. (Available in sizes 1" - 32")

3. Sign	Pressure rating (Note: See table 1 on page 3)
C	ASME 150
D	ASME 300 For RE1D use sign "D" for both 150# and 300# valves.

4. Sign	Construction (Note: See table 2 on page 3)
A	Standard, drive shaft with ANSI keyway to actuator

5. Sign	Size
	Inch 1", 1 1/2", 2", 2 1/2", 3", 4", 6", 8", 10", 12", 14", 16", 20", 24", 28", 32"

6. Sign	Body, blind flange & screw materials
A	ASTM A351 gr. CF8M (standard for sizes 12" and larger as well as 300# Class Flanged models)
D	ASTM A216 gr. WCB / 1-0619 (blind flange & gland bolting A4-80, corresponds to B8M)
C	ASTM A351 gr. CG8M (blind flange & gland bolting A4-80, corresponds to B8M)

Note:- Gland material is always CF8M

7. Sign	Segment materials
J	Type AISI 329+HCr; ANSI 316+HCr for low Cv segments
C	CG8M + HCr
S	Type AISI 329 ( without chrome ). Used with soft seats, eg. RECA_CSJT2T

8. Sign	Shaft, pin & bearing materials
J	Type AISI 329 Drive Shaft & PTFE on SS 316 net
S	17-4 PH / Cobalt (2" - 10")

9. Sign	Seat design and materials
A	316 SS + cobalt based hard facing High temp. metal seat (2"-10") only
S	Stainless Steel+Cobalt Hard facing, Inconel 625 spring, Filled PTFE/Elgiloy lipseal, -40 °F ...+480 °F ANSI/FCI 70-2 class IV, General services
T2	Stainless Steel with PTFE+C25 % insert
E	Cobalt based alloy, -40 °F ...+480 °F Non-tight, extremely erosive services.
1S	316 SS + Cobalt based hard facing, 2-way metal seat

10. Sign	Stem packing & blind flange seal
T	PTFE V-rings, live-loaded
G	Graphite rings, live loaded (fire-safe)

11. Sign	Model Code
-	Version 0
A	Version A -availability for high temperature construction

12. Sign	Flange facing
/-	ASME B16.5 (Ra 3.2 – 6.3 / RMS 125-250) Cover EN1092-1 Type B1

Subject to change without prior notice.

### Metso Flow Control Inc.

**Europe**, Vanha Porvoontie 229, P.O. Box 304, FI-01301 VANTAA, Finland.  
Tel. +358 20 483 150. Fax +358 20 483 151

**North America**, 44 Bowditch Drive, P.O. Box 8044, Shrewsbury, MA 01545, USA.  
Tel. +1 508 852 0200. Fax +1 508 852 8172

**South America**, Av. Independência, 2500- Iporanga, 18087-101, Sorocaba-São Paulo, Brazil.  
Tel. +55 15 2102 9700. Fax +55 15 2102 9748/49

**Asia Pacific**, 238B Thomson Road, #17-01 Novena Square Tower B, Singapore 307685.  
Tel. +65 6511 1011. Fax +65 6250 0830

**China**, 11/F, China Youth Plaza, No.19 North Rd of East 3rd Ring Rd, Chaoyang District, Beijing 100020, China. Tel. +86 10 6566 6600. Fax +86 10 6566 2583.

**Middle East**, Roundabout 8, Unit AB-07, P.O. Box 17175, Jebel Ali Freezone, Dubai, United Arab Emirates. Tel. +971 4 883 6974. Fax +971 4 883 6836

[www.metso.com/valves](http://www.metso.com/valves)

