



P700

SPECIFICATIONS

- **Rugged Design for Harsh Environments**
- **Versatile Packaging Design**
- **Low and High Level Output Signals**
- **Intrinsic Safety Approval to Ex ia IIc T4**
- **High Overpressure Capability**

P700 series pressure transducers are designed for high reliability and stability. The all welded construction incorporates a double cantilever beam with bonded foil strain gauges. Coupling to the pressure diaphragm via a force rod, gives excellent thermal isolation from the fluid or gas being measured. High overload protection is an integral part of the design. These units are capable of sensing extremely small changes of applied pressure and are relatively insensitive to vibration, altitude and shock.

For parts requiring RoHS compliance, please contact factory.

FEATURES

- Low and High Level Output
- All Welded Construction
- High Pressure Overload Protection
- Pressure Ranges 0-10,000 PSI (0.7 to 700 bars)
- 2 Wire 4-20 mA Option BASEEFA and Cenelec Approval Class Ex ia IIc T4

APPLICATIONS

- Hydraulic Pressure Monitoring
- Torpedo Depth Sensing
- Vehicle Brake System Monitoring
- Military and Commercial Aircraft

PERFORMANCE SPECS

Low Level Output			
Model Number	P711/9	P721/4	P701/9
Input Supply	10VDC/AC RMS	10VDC/AC RMS	10VDC/AC RMS
Voltage (Max)	12V	12V	12 V
Impedance (ohms)	350	350	350
Current	±5%	±5%	±5%
	-	-	-
Output at +25°C			
Full Range Output with 1 metre cable	25mV, ±2%	25mV, ±2%	25mV, ±1%
Impedance (ohm)	350, ±5%	350, ±5%	350, ±5%
Current (mA max)	-	-	-
Residual Unbalance % F.R.O.	< ± 2	< ± 2	< ± 1
Accuracy			
Combined Non-Linearity (Typical)	± 0.2	± 0.2	± 0.18
Hysteresis and Non Repeatability % F.R.O. (Max)	± 0.2	± 0.5	± 0.3
Combined Thermal M.R.	± 0.03	± 0.03	± 0.02
Zero and Sensitivity Error %F.R.O./ °C H.R.	± 0.03	± 0.03	± 0.015
Physical			
Max. Height (L/mm)	64.4	64.4	64.4
Cable version (mm/in.)	83/3.27	83/3.27	83/3.27
Connector version (mm/in.)	83/3.27	83/3.27	83/3.27
Weight (gm)	230	230	230

PERFORMANCE SPECS (CONT)

High Level Output					
Model Number	P741/9	P751/9	P761/9	P781/9	P791/9
Input Supply					
Voltage (Max)	10VDC/AC RMS	11-18VDC	18-32VDC	10-36VDC	±15VDC
Impedance (ohms)	12 V max	-	-	-	-
Current	30-35mA	20-40mA	30-40mA	-	30mA
Output at +25°C					
Full Range Output with 1 metre cable	5V ±1%	2.5V ±1%	5V ±1%	4-20 mA	5.0 ±1%
Impedance (ohm)	<10 ohm	<10 ohm	<10 ohm	Load Resist. 1.0 k max. at 36VDC	<10 ohm
Current (mA max)	5	5	5	-	5
Residual Unbalance % F.R.O.	< ± 1	< ± 2	< ± 1	1 < ± 1	< ± 1
Accuracy					
Combined Non-Linearity (Typical)	± 0.18	± 0.18	± 0.18	± 0.18	± 0.18
Hysteresis and Non Repeatability % F.R.O. (Max)	± 0.25	± 0.25	± 0.25	± 0.25	± 0.25
Combined Thermal M.R.	± 0.02	± 0.02	± 0.02	± 0.02	± 0.02
Zero and Sensitivity Error %F.R.O./ °C H.R.	± 0.015	± 0.015	± 0.015	± 0.015	± 0.015
Physical					
Max. Height (L/mm)	91.6	91.6	91.6	91.6	91.6
Cable version (mm/in.)	99/3.90	114/4.49	114/4.49	129/5.07	99/3.90
Connector version (mm/in.)	99/3.90	114/4.49	114/4.49	129/5.07	99/3.90
Weight (gm)	250 gm	250 gm	250 gm	250 gm	250 gm

COMMON SPECIFICATIONS

- Pressure Ranges** Gauge or absolute reference
- High (psi)** 0-75, 100, 150, 200, 250, 350, 500, 750, 1000, 1500, 2000, 2500, 3500, 5000, 7500, 10,000
- (bar)** 0-5, 0, 7, 10, 15, 20, 25, 35, 50, 70, 100, 150, 200, 250, 350, 500, 700
- Medium (psi)** 0-10, 15, 20, 25, 35, 50
- (bar)** 0-0.7, 1.0, 1.5, 2.0, 2.5, 3.5
- DIN (bar)** 0.6, 1, 1.6, 2.5, 4, 6, 10, 16, 25, 40, 60, 100, 160, 250, 400, 600
- Pressure Limit** <5x full range pressure or 12,000 psi whichever is less
- Burst Pressure** >10x full range pressure or 20,000 psi whichever is less
- Pressure Media** Liquids or gases compatible with 17-4 PH and 17-7 PH stainless steel or Inconel 625
- Shunt Calibration** 80% ±5% full range pressure
- Residual Unbalance** <±1% F.R.O. P700
<±2% F.R.O. P720

- Temperature Range**
- Operable** -65°F to 250°F (-54°C to 120°C)
- Compensated** 32°F to 212°F (0°C to 100°C)
- Humidity**
- Plug Outlet** 95% Relative humidity
- Cable Outlet** Immersible to 1000 feet
- Acceleration Response** < 0.10% F.R.O./g (Medium range)
<0.02% F.R.O./g (High range)
- Natural Frequency** Approx 2.5 kHz for 10 psi to approx 40 kHz for 10,000 psi
- Insulation Resistance** 500 MOhm at 50 VDC


1. A low current consumption version is available (1000 ohm bridge) at extra cost.

CONNECTIONS


CONNECTIONS:

CABLE CONNECTIONS
RED* PIN A* EXCITATION (+)
WHITE PIN D EXCITATION (-)
YELLOW PIN B OUTPUT (+)
BLUE* PIN C* OUTPUT (-)
VIOLET PIN E } 80% Shunt calibration
GREY PIN F }


* 2 - Wire transmitter connections
0 Volt P791/4

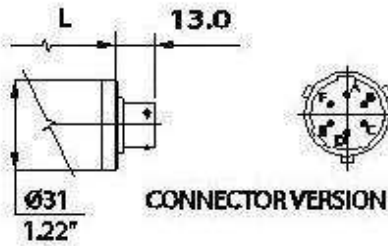

6 way bayonet
hermetically sealed
MII - C 26482
shell size 10

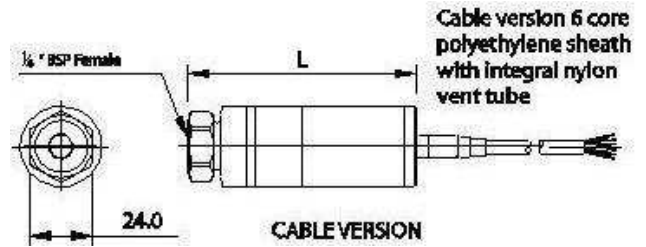

ORDERING INFORMATION

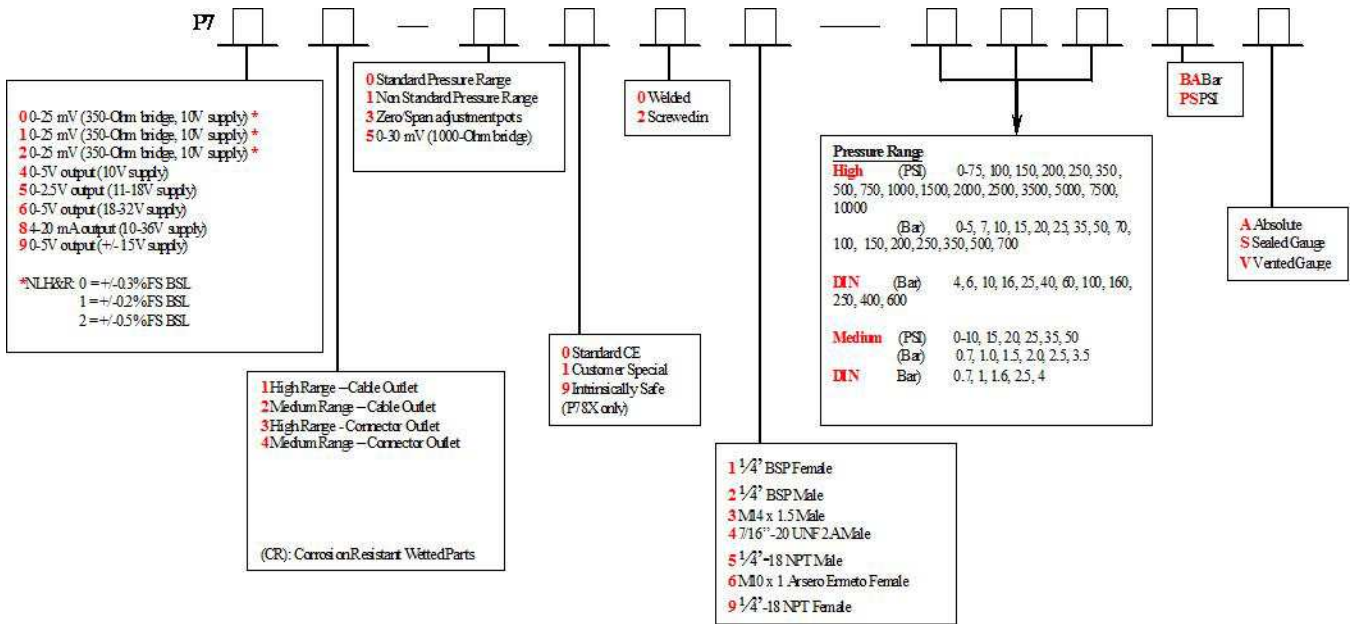

NOTE: Unit comes standard with 1 meter of cable.

For a different cable length, add 2 digits "xx" to the end of the configuration above indicating the length desired. Max 20 meters.

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity company
45738 Northport Loop West
Fremont, CA 94538
Tel: +1 800 767 1888
Fax: +1 510 498 1578
customercare.fmt@te.com

EUROPE

MEAS France SAS,
a TE Connectivity company
4 Rue Gaye Marie
31027 Toulouse, France
Tel: +33 (5) 822 822 00
Fax: +33 (5) 820 821 51
customercare.tlse@te.com

ASIA

Measurement Specialties (China) Ltd.,
a TE Connectivity company
No. 26 Langshan Road
Shenzhen High-Tech Park (North) Nanshan District,
Shenzhen, 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.