

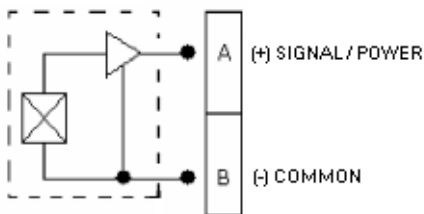


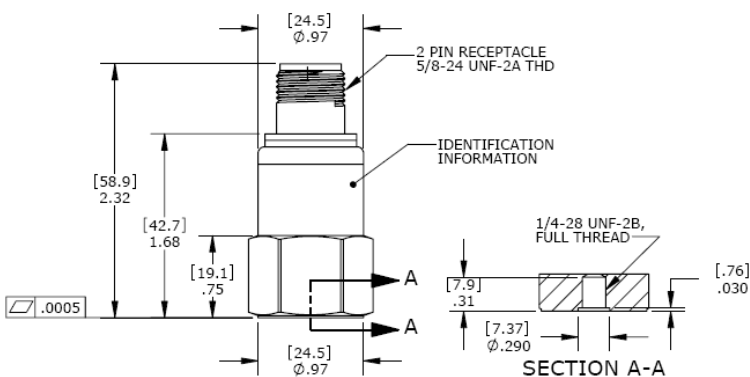

## DIMENSIONS

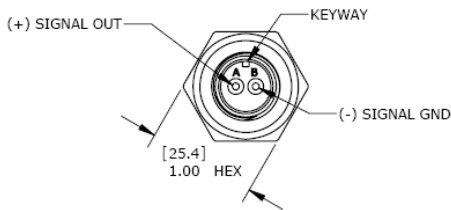

# MODEL 8011-06 PIEZO VELOCITY TRANSDUCER

## SPECIFICATIONS

- IEPE Piezo Velocity Transducer
- 100mV/ips & 500mV/ips Ranges
- Case Isolated, Internally Shielded
- Low Frequency Condition Monitoring

The Model 8011-06 is an internally shielded piezo velocity transducer designed for condition monitoring of low frequency rotating machinery. The transducer is available in ranges from 10.0 to 50.0 in/sec and interfaces with the standard IEPE constant current supply. The model 8011-06 features a top exit MIL-C-5015 connector and is designed to operating in temperature ranges from -50°C to +120°C. The unit is hermetically sealed and features the popular stud mount installation.

## FEATURES

- 10.0 to 50.0 in/sec Dynamic Range
- 2-7000Hz Bandwidth
- -50°C to +120°C Temperature Range
- Hermetically Sealed, Welded
- Reverse Wiring Protection
- Stable Temperature Response
- 2-Pin MIL-C-5015 Connector

## APPLICATIONS

- Rotating Machinery
- Paper Mills
- Motors and Pumps
- Machine Spindles

# MODEL 8011-06 PIEZO VELOCITY TRANSDUCER

## PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 4mA excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters			Notes
<b>DYNAMIC</b>			
Dash Number	-100	-500	
Measurement Range (in/sec)	0-10	0-50	
Measurement Range (mm/sec)	0-254	0-1270	
Sensitivity (mV/in/sec)	500	100	±10%
Sensitivity (mV/mm/sec)	19.7	3.9	
Frequency Response (Hz)	3-4500	5-3500	±10%
Frequency Response (Hz)	2-7000	2-6000	±3dB
Natural Frequency (Hz)	17,000	17,000	
Non-Linearity (%FSO)	±1	±1	
Transverse Sensitivity (%)	<5	<5	
Shock Limit (g)	2500	2500	
Residual Noise (µin/sec)	25	120	1Hz to 3kHz
<b>ELECTRICAL</b>			
Compliance Voltage (Vdc)	18 to 30		
Excitation Current (mA)	2 to 10		
Bias Voltage (Vdc)	8 to 12		
Output Impedance (Ω)	<100		
Insulation Resistance (MΩ)	>100		@100Vdc
Grounding	Case Isolated, Internally Shielded		
<b>ENVIRONMENTAL</b>			
Temperature Response (%)	±5		
Operating Temperature (°C)	-50 to +120		
Storage Temperature (°C)	-50 to +120		
Humidity	Hermetically Sealed, IP67		
<b>PHYSICAL</b>			
Sensing Element	Ceramic (compression mode)		
Case Material	Stainless Steel		
Weight (grams)	145		
Mounting Torque	24 lb-in (2.7 N-m)		
<b>Calibration supplied:</b>	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±3dB Frequency Response Limit	
<b>Supplied accessories:</b>	AC-A03663	¼-28 to ¼-28 mounting stud	
<b>Optional accessories:</b>	316A-XXX	Cable Assembly, Straight (XXX designates length in inches, 10ft standard)	
	318A-XXX	Cable Assembly, 90 Degrees (XXX designates length in inches, 10ft standard)	
	AC-D03664	¼-28 to M5 Mounting Stud	
	AC-D03665	¼-28 to M6 Mounting Stud	
	AC-A04209	Magnetic Mounting Adaptor	
	AC-D04210	Adhesive Mounting Adaptor	

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

## ORDERING INFORMATION

### PART NUMBERING

8011-06-ZZZ  
I\_\_\_\_\_ Dynamic Range (100 is 0-10.0 in/sec)

-ZZZ  
100 = 0-10.0 in/sec (0-1270 mm/sec)  
500 = 0-50.0 in/sec (0-254 mm/sec)

Example: 8011-06-100  
Model 8011-06, 0-10.0 in/sec (0-1270 mm/sec)

### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1000 Lucas Way  
Hampton, VA 23666  
Sales and Customer Service  
Tel: +1-800-745-8008 or  
+1-757-766-1500  
Fax: +1-757-766-4297  
t&m@meas-spec.com

### EUROPE

MEAS France SAS  
a TE Connectivity Company  
26 Rue des Dames  
F78340 Les Clayes-sous-Bois  
France  
Sales and Customer Service  
Tel: +33 (0) 1 79 33 00  
Fax: +33(0)1 34 81 03 59  
t&m@meas-spec.com

### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Sales and Customer Service  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
t&m@meas-spec.com

### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.