



RCS01-10 RCS Series-Level Sensor

Features

- High or low level sensing
- Internal fitting components
- Reed Switch reliability
- Silicon sealing washer
- Easy installation

Comments

- Normally open or normally closed by float reversal
- Suitable for a wide range of liquids
- Side entry with Vertical float travel

Applications

- Waste Water Level
- Coolant level indication
- Drinking water level
- Cooling systems
- Water high or low Level

Material

Housing/Shuttle Material Polypropylene Foamed Polypropylene Contact Material Ruthenium

Float SG 0.64

Operating Temperature °C -30 to 70

Housing Color Charcoal/Black
Float Color White

Cable

Cable Length 2 x 0.1M Connection Type Stripped Cables

Cable Type22 ÅWG 16/0.2mm PVC insulatedCable ColorBlack/Black

Mechanical Specifications

Shock 50g for 11mS duration Vibration 35g up to 500Hz Maximum Pressure 30mm IP IP65 Mounting Thread

Thread M16
Fitment Internal
Mounting Any Axis

Switching

Switch Action (Reed Switch)

Max Switching Voltage VDC

Max Switching Voltage VAC

Max Switching Current Amps

Max Switching Load Watt

Operate Mode
Contact Form

SPST


200

250

30

N/C with float horizontal

Technical Drawing

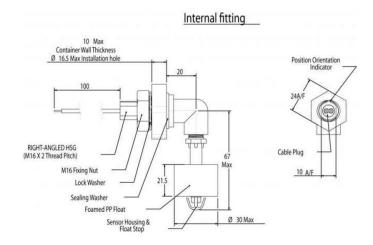

NORTH AMERICA & EUROPE

MEAS Deutschland GmbH a TE Connectivity Company Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20

Email: info.de@meas-spec.com

ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company No. 26 Langshan Road Shenzhen High-Tech Park (North) Nanshan District, Shenzhen 518057 China Tel +86 755 3330 5088

Fax +86 755 3330 5088 Fax +86 755 3330 5099

te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, MEAS, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.