



RoHS

# **DP86** Uncompensated with Fitting

### SPECIFICATIONS

- 316L SS
- Wet/Wet Differential Low Pressure

The DP86 uncompensated with fitting differential pressure sensor is a double-sided, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing. The DP86 uncompensated with fitting can be designed with up to 8 different threaded process fittings. The sensing package utilizes silicone oil to transfer pressure from the two 316L stainless steel diaphragms to a single sensing element.

The DP86 uncompensated with fitting is designed for high performance, low pressure applications where differential pressure measurement is required. The stainless steel package makes it suitable for use in liquids and corrosive environments.

Please refer to the DP86, non-silicone oil, constant current and constant voltage (fittings and cable design) for more information on different features of the DP86

### FEATURES

Threaded Process Fittings Up to -40°C to +125°C Operating Range Up to ±0.1% Pressure Non Linearity Solid State Reliability Low Pressure

### **APPLICATIONS**

Level Controls Tank Level Measurement OEM Equipment Corrosive Fluids and Gas Measurement Systems Flow Measurements

### STANDARD RANGES

Range	psid
0 to 1	•
0 to 5	•
0 to 15	•
0 to 30	•
0 to 50	•
0 to 100	•
0 to 300	•
0 to 500	•

## PERFORMANCE SPECIFICATIONS

#### Supply Current: 1.5mA

Ambient Temperature: 25°C (unless otherwise specified)

		001PSI			005PSI			≥015PSI			NOTEO
PARAMETERS	MIN	ТҮР	МАХ	MIN	ТҮР	MAX	MIN	ТҮР	MAX	UNITS	NOTES
Sensitivity	9.0		20.0	12.5	19.5	26.5	13.2	20	26.5	mV/V@FS	
Zero Pressure Output	-4.0		8.0	-6.0		8.0	-6.0		8.0	mV/V	1
Pressure Non Linearity	-0.30		0.30	-0.20		0.20	-0.10		0.10	%Span	2
Pressure Hysteresis	-0.10		0.10	-0.10		0.10	-0.05		0.05	%Span	
Input/Output Resistance	4400		6200	3800	4400	5800	3800	4400	5800	Ω	
Temp. Coefficient – Span	-3300	-2800	-2300	-1650	-1250	-1000	-1450	-1250	-1000	ppm/°C	3
Temp. Coefficient – Offset		1			1			1		uV/V/°C	3
Temp. Coefficient – Resistance	2600	3200	3500	1300	1510	1750	1300	1510	1750	ppm/°C	3
Thermal Hysteresis – Span	-0.25		0.25	-0.25		0.25	-0.25		0.25	%Span	3
Thermal Hysteresis – Offset	-0.25		0.25	-0.25		0.25	-0.25		0.25	%Span	3
Line (Common Mode) Pressure			1000			1000			1000	psi	
Line Pressure Effect on Zero			4.0			0.8			0.5	%Span/1Kpsi	
Pressure Overload			10X			ЗX			ЗX	Rated	4
Pressure Burst			12X			4X			4X	Rated	4, 5
Operating Temperature	-40		+85	-40		+125	-40		+125	°C	
Storage Temperature	-40		+85	-40		+125	-40		+125	°C	
Vibration (10~2000Hz)			20			20			20	g	
Insulation Resistance (50Vdc)	50			50			50			MΩ	6
Output Load Resistance	5			5			5			MΩ	7
Supply Voltage		5.0	12.0		5.0	9.5		5	9.5	V	
Supply Current			2.0			1.5			1.5	mA	
Voltage Breakdown			500			500			500	Vrms	
Endurance (FS @ 25°C)					1,000,000	)				Cycles	
Maalia Carenatikilitu											

Media Compatibility -

Pressure Port

All fluids and gases compatible with 316L Stainless Steel

#### Notes

1. Measured at ambient.

2. Best fit straight line

3. Over the temperature range -20°C to +85°C (0°C to 50°C for 1psi, 0°C to 70°C for 5psi) with respect to 25°C.

4. For "H" (high-end) port, rated or 1000psi whichever is less; for "L" (low-end) port, rated or 150psi whichever is less. The maximum pressure that can be applied without changing the transducer's performance or accuracy.


The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.


6. Between case and sensing element.

7. Load resistance to reduce measurement errors due to output loading.

 Direct mechanical contact with diaphragms is prohibited. Diaphragm surfaces must remain free of defects (scratches, punctures, fingerprints, etc.) for device to operate properly. Caution is advised when handling parts with exposed diaphragms. Use protective bag whenever devices are not in use.


# **DIMENSIONS**

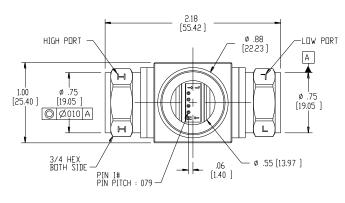


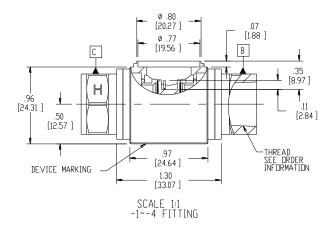

FITTTING TYPE		
1 = 1/8-27 NPT, FEMALE, 3/4 HEX		
2 = 1/4-18 NPT, FEMALE, 3/4 HEX		
3 = 7/16-20 UNF, FEMALE, 3/4 HEX		
4 = 1/4-19 BSP, FEMALE, 3/4 HEX		
5 = 1/8-27 NPT, MALE, 3/4 HEX		
6 = 1/4-18 NPT, MALE, 3/4 HEX		
7 = 7/16-20 UNF, MALE, 3/4 HEX		
8 = 1/4-19 BSP, MALE, 3/4 HEX		

PIN #	FUNCTION
1	+OUT
2	+EX
3	-OUT
4	-EX







1/4-19 BSP-

---


٦

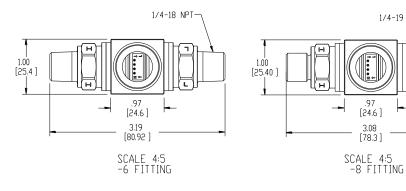

### CONNECTIONS



#### **ORDERING INFORMATION**



Electrical (U = Leads, Uncompensated) Fitting (See Fitting Table) Unit (P = psi) Pressure Range Model

#### NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity Company 45738 Northport Loop West Fremont, CA 94538 Tel: 1-800-767-1888 Fax: 1-510-498-1578 Sales: pfg.cs.amer@meas-spec.com

#### EUROPE

MEAS France SAS, a TE Connectivity Company 26 Rue des Dames 78340 Les Clayes-sous-Bois, France Tel: +33 (0) 130 79 33 00 Fax: +33 (0) 134 81 03 59 Sales: pfg.cs.emea@meas-spec.com

#### ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company No. 26 Langshan Road Shenzhen High-Tech Park (North) Nanshan District, Shenzhen 518057 China Tel: +86 755 3330 5088 Fax: +86 755 3330 5099 Sales: pfg.cs.asia@meas-spec.com

#### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.