



RoHS

H(T)U(F)3500 SERIES

Analog Relative Humidity module with Temperature output

SPECIFICATIONS

- Compact plug and play module with no external component required
- Can operate under 5VDC or 3VDC
- Relative Humidity and Temperature Analog Output
- Full interchangeability. No calibration required
- Can operate under 5VDC or 3VDC
- Low power consumption
- Fast response time

Based on the new humidity sensor HTU21P, HTU3500 Series are dedicated humidity and temperature plug and play transducer designed for OEM applications where reliable and accurate measurements are needed. Direct interface with a micro-controller is made possible with the modules humidity linear voltage and direct NTC outputs. The HTU3500 Series are designed for high volume and demanding applications where power consumption is critical.

Optional PTFE filter/membrane (F) protects HTU3500 Series modules analog humidity modules with temperature output against dust, water immersion as well as against contamination by particles. PTFE filter/membrane preserves a high response time. Several connectors are proposed. 5VDC or 3VDC power supply products are available.


HU3500 - analog Humidity sensor only - can be proposed

FEATURES

- Full interchangeability with no calibration required in standard conditions
- Instantaneous desaturation after long periods in saturation phase
- Analog output
- Demonstrated reliability and long term stability
- Reliability not affected by repeated condensation
- HU3500 analog humidity sensor only can be proposed

APPLICATIONS

- Home appliance
- Medical
- Printers
- Humidifier

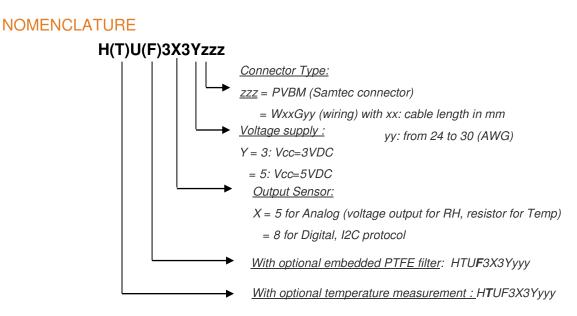


PERFORMANCE SPECS

MAXIMUM RATINGS

| Ratings | | Symbol | Value | Unit |
|-----------------------------|------------------|------------------|--------------|-----------------|
| Storage Temperature | | T _{stg} | -40 to 125 | °C |
| Supply Valtage (Deels) | HTU3533 products | V _{cc} | 16V | V _{dc} |
| Supply Voltage (Peak) | HTU3535 products | Vcc | 16V | V _{dc} |
| Humidity Operating Range | | RH | 0 to 100 | %RH |
| Temperature Operating Range | | Ta | -40 to +85 | °C |
| | HTU3533 products | | -0.3 to 3.6V | V |
| VDD to GND | HTU3535 products | | -16 to 16V | V |
| Input current on any pin | | | -10 to +10 | mA |

Peak conditions: less than 10% of the operating time

Exposure to absolute maximum rating conditions for extended periods may affect the sensor reliability.

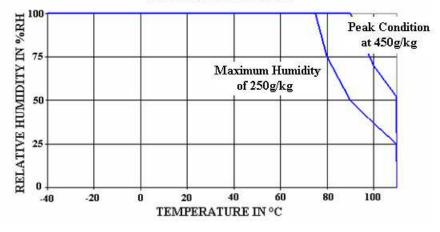

OPERATING RANGE

ELECTRICAL AND GENERAL ITEMS

HTU35Y3

| Characteristics | Symbol | Min | Тур | Max | Unit |
|------------------------------|--------|------|-------|------|-----------------|
| Voltage Supply (1) (2) | Vcc | 2.85 | 3.0 | 3.15 | V _{dc} |
| Nominal Output @55%RH | Vout | | 1.490 | | V |
| Humidity Average Sensitivity | ΔmV/RH | - | +16 | - | mV/%RH |
| Current consumption | lcc | - | 1.0 | 1.2 | mA dc |

(1) Module is ratiometric to voltage supply
(2) Maximum power supply ramp up time to VCC should be less than 20ms

HTU35Y5

| Characteristics | Symbol | Min | Тур | Max | Unit |
|------------------------------|-----------------|-------|-------|-------|-----------------|
| Voltage Supply (1) (2) | V _{cc} | 4.75 | 5 | 5.25 | V _{dc} |
| Nominal Output @55%RH | Vout | 2.401 | 2.480 | 2.559 | V |
| Humidity Average Sensitivity | ΔmV/RH | - | +26 | - | mV/%RH |
| Current consumption | Icc | - | 1.2 | 1.5 | mA dc |

(1) Module is ratiometric to voltage supply

Maximum power supply ramp up time to VCC should be less than 20ms

SENSOR PERFORMANCE

ELECTRICAL CHARACTERISTICS

(@T=23°C, $R_L>1M\Omega$ unless otherwise noted)

| Humidity Characteristics | Symbol | Min | Тур | Max | Unit |
|--|--------|-----|------|-----------|--------|
| Humidity Measuring Range | RH | 0 | | 100 | %RH |
| Relative Humidity Accuracy (20% to 80%RH) | | | ±2 | See graph | %RH |
| Temperature coefficient (10°C to 50°C) | Tcc | | | -0.15 | %RH/°C |
| Recovery time after 150 hours of condensation | t | | 10 | | S |
| Humidity hysteresis | | | +/-1 | | %RH |
| Output impedance | Z | | | 50 | Ω |
| Sink current capability ($R_{L_{Min}} = 8 \text{ kOhms}$) ⁽¹⁾ | I | | | 1 | mA |
| Warm up time (90% of signal) | tw | | 150 | | ms |
| Time Constant (at 63% of signal) 33%RH to 75%RH $^{(2)}$ | τ | | 5 | 10 | S |

(1) Conditions of sink current: Vout + 0.054V (3%RH) at Vout = 0.600 V (Vout min)

(2) At 1m/s air flow

| Temperature Characteristics* | Symbol | Min | Тур | Max | Unit |
|--------------------------------------|--------|------|------|------|------|
| Nominal resistance @ 25°C | R | 9.9 | 10 | 10.1 | kΩ |
| Beta value : B25/50 | В | 3346 | 3380 | 3414 | К |
| Temperature measuring range | Ta | -40 | | +80 | °C |
| Nominal Resistance Tolerance at 25°C | Rn | | 1 | | % |
| B value tolerance | В | | 1 | | % |
| Time Constant | Т | | 10 | | S |

* Except for low temperatures

POWER SUPPLY OPTION OF HTU3500 SERIES AT $3V_{DC}$ OR AT $5V_{DC}$

At $3V_{DC}$ or at $5V_{DC}$ power supply, there is no measurable impact of type of powering on temperature and RH accuracy.

HUMIDITY LOOK-UP TABLES

| ŀ | HTU3535 Modeled Voltage Output | | | | | |
|----|------------------------------------|----|------|--|--|--|
| F | Reference Output Values (Vcc = 5V) | | | | | |
| 0 | Vout (mV) RH (%) Vout (mV) | | | | | |
| 10 | 1235 | 55 | 2480 | | | |
| 15 | 1390 | 60 | 2605 | | | |
| 20 | 1540 | 65 | 2730 | | | |
| 25 | 1685 | 70 | 2860 | | | |
| 30 | 1825 | 75 | 2990 | | | |
| 35 | 1960 | 80 | 3125 | | | |
| 40 | 2090 | 85 | 3260 | | | |
| 45 | 2220 | 90 | 3400 | | | |
| 50 | 2350 | 95 | 3530 | | | |

POLYNOMIAL EQUATIONS

$$\begin{split} V_{out} &= 8.43 \overline{E^{-4}} \ RH^3 - 0.1485 \ RH^2 + 34.16 \ RH + 909 \\ RH &= -1.564 \overline{E^{-9}} V_{out}{}^3 + 1.205 \overline{E^{-5}} V_{out}{}^2 + 8.22 \overline{E^{-3}} V_{out} - 15.6 \\ & \ with \ V_{out} \ in \ mV \ and \ RH \ in \ \% \end{split}$$

LINEAR EQUATIONS

 $V_{out} = 26.23 \text{ RH} + 1032$ RH = 0.03812 $V_{out} - 39.36$ with V_{out} in mV and RH in %

Reference Output Values (Vcc = 3V) RH (%) Vout (mV) RH (%) Vout (mV) 10 740 55 1490 15 835 60 1565 20 65 925 1640 25 70 1010 1715 30 75 1095 1795 35 1175 80 1875 40 1255 85 1955 2040 45 1330 90 50 1410 95 2120

HTU3533 Modeled Voltage Output


POLYNOMIAL EQUATIONS

 $\begin{array}{l} V_{out} = 5.05 E^{-4} \; RH^3 - 8.91 \; E^{-2} \; RH^2 + 2.05 \; E^1 \; RH + 5.45 \; E^2 \\ RH = -7,23 \; E^{-9} V_{out}{}^3 + 3,34 \; E^{-5} V_{out}{}^2 + 1,37 \; E^{-2} V_{out} \; - 15.6 \\ with \; V_{out} \; in \; mV \; and \; RH \; in \; \% \end{array}$

LINEAR EQUATIONS

 $V_{out} = 15.94 \text{ RH} + 606$ RH = 0,0627 V_{out} - 37,969 with V_{out} in mV and RH in %

RELATIVE HUMIDITY ERROR BUDGET CONDITIONS AT 25°C

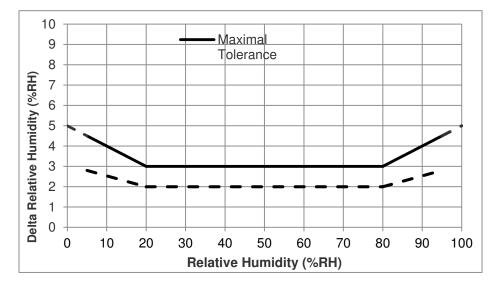

TEMPERATURE COEFFICIENT COMPENSATION EQUATION

For other temperatures than 25°C, the following temperature coefficient compensation equation can be used and will guarantee Relative Humidity accuracy given in table1, from 0°C to 80°C:

$$RH_{compensatedT} = RH_{actualT} + f(T)$$

RHactualTAmbient humidity in %RH, computed from HTU21D(F) sensorTactualHumidity cell temperature in °C, computed from HTU21D(F) sensorf(T)RH correction (in %RH) is a linear function of the temperature T (°C) as describedbelow:f(T) = -0.15 * (25 - T)

TEMPERATURE

| Temperature Characteristics | Symbol | Min | Тур | Max | Unit |
|--------------------------------------|--------|------|------|------|------|
| Nominal resistance @ 25°C | R | 9.9 | 10 | 10.1 | kΩ |
| Beta value : B25/50 | В | 3346 | 3380 | 3414 | K |
| Temperature measuring range | Ta | -40 | | 110 | °C |
| Nominal Resistance Tolerance at 25°C | Rn | | 1 | | % |
| B value tolerance | В | | 1 | | % |
| Time Constant | Т | | 10 | | S |

TYPICAL TEMPERATURE OUTPUT

Depending on the needed temperature measurement range and associated accuracy, we suggest two methods to access to the NTC resistance values.

$$R_T = R_N \times e^{\beta \left(\frac{1}{T} - \frac{1}{T_N}\right)}$$

 R_T NTC resistance in Ω at temperature T in K

 R_N NTC resistance in Ω at rated temperature T in K

T, T_N Temperature in K

β Beta value, material specific constant of NTC

e Base of natural logarithm (e=2.71828)

 \bigcirc The exponential relation only roughly describes the actual characteristic of an NTC thermistor can, however, as the material parameter β in reality also depend on temperature. So this approach is suitable for describing a restricted range around the rated temperature or resistance with sufficient accuracy.


© For practical applications, a more precise description of the real R/T curve may be required. Either more complicated approaches (e.g. the Steinhart-Hart equation) are used or the resistance/temperature relation as given in tabulation form. The below table has been experimentally determined with utmost accuracy for temperature increments of 1 degree.

Actual values may also be influenced by inherent self-heating properties of NTCs. Please refer to MEAS-France Application Note HPC106 "Low power NTC measurement

TEMPERATURE LOOK-UP TABLE

| Temp | R | Temp | R |] | Temp | R | | Temp |
|------|--------|------|-------|---|------|------|---|------|
| (°C) | (Ω) | (°C) | (Ω) | | (°C) | (Ω) | | (°C) |
| -40 | 195652 | 0 | 27219 | | 40 | 5834 | | 80 |
| -39 | 184917 | 1 | 26076 | 1 | 41 | 5636 | | 81 |
| -38 | 174845 | 2 | 24988 | | 42 | 5445 | | 82 |
| -37 | 165391 | 3 | 23951 | | 43 | 5262 | | 83 |
| -36 | 156513 | 4 | 22963 | | 44 | 5086 | | 84 |
| -35 | 148171 | 5 | 22021 | | 45 | 4917 | | 85 |
| -34 | 140330 | 6 | 21123 | | 46 | 4754 | | 86 |
| -33 | 132958 | 7 | 20267 | | 47 | 4597 | | 87 |
| -32 | 126022 | 8 | 19450 | | 48 | 4446 | | 88 |
| -31 | 119494 | 9 | 18670 | | 49 | 4301 | | 89 |
| -30 | 113347 | 10 | 17926 | | 50 | 4161 | | 90 |
| -29 | 107565 | 11 | 17214 | | 51 | 4026 | | 91 |
| -28 | 102116 | 12 | 16534 | | 52 | 3896 | | 92 |
| -27 | 96978 | 13 | 15886 | | 53 | 3771 | | 93 |
| -26 | 92132 | 14 | 15266 | | 54 | 3651 | | 94 |
| -25 | 87559 | 15 | 14674 | | 55 | 3535 | | 95 |
| -24 | 83242 | 16 | 14108 | | 56 | 3423 | | 96 |
| -23 | 79166 | 17 | 13566 | | 57 | 3315 | | 97 |
| -22 | 75316 | 18 | 13049 | | 58 | 3211 | | 98 |
| -21 | 71677 | 19 | 12554 | | 59 | 3111 | | 99 |
| -20 | 68237 | 20 | 12081 | | 60 | 3014 | | 100 |
| -19 | 64991 | 21 | 11628 | | 61 | 2922 | | 101 |
| -18 | 61919 | 22 | 11195 | | 62 | 2834 | | 102 |
| -17 | 59011 | 23 | 10780 | | 63 | 2748 | | 103 |
| -16 | 56258 | 24 | 10382 | | 64 | 2666 | | 104 |
| -15 | 53650 | 25 | 10000 | | 65 | 2586 | | 105 |
| -14 | 51178 | 26 | 9634 | | 66 | 2509 | | 106 |
| -13 | 48835 | 27 | 9284 | | 67 | 2435 | | 107 |
| -12 | 46613 | 28 | 8947 | | 68 | 2364 | | 108 |
| -11 | 44506 | 29 | 8624 | | 69 | 2294 | | 109 |
| -10 | 42506 | 30 | 8315 | - | 70 | 2228 | | 110 |
| -9 | 40600 | 31 | 8018 | - | 71 | 2163 | | |
| -8 | 38791 | 32 | 7734 | 1 | 72 | 2100 | | |
| -7 | 37073 | 33 | 7461 | | 73 | 2040 | | |
| -6 | 35442 | 34 | 7199 | | 74 | 1981 | | |
| -5 | 33892 | 35 | 6948 | - | 75 | 1925 | | |
| -4 | 32420 | 36 | 6707 | - | 76 | 1870 | | |
| -3 | 31020 | 37 | 6475 | - | 77 | 1817 | | |
| -2 | 29689 | 38 | 6253 | - | 78 | 1766 | | |
| -1 | 28423 | 39 | 6039 |] | 79 | 1716 | l | |

TEMPERATURE ERROR BUDGET

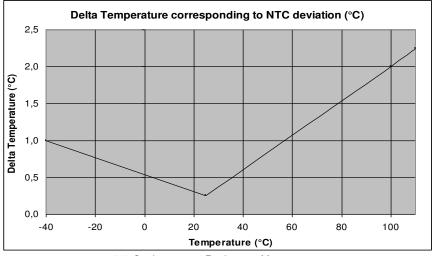

0.1°C tolerance on Resistance Measurement

STEINHART-HART COEFFICIENTS

According to the equation below, the Steinhart-Hart coefficients for the operating temperature range for HTU3500 products thermistor are:

$$\frac{1}{T} = a + b * \ln(R) + C * \ln(R) * \ln(R) * \ln(R)$$

R NTC resistance in Ω at temperature T in K


- T Temperature in K
- a Constant value (a= 8.61393E-04)
- b Constant value (b= 2.56377E-04)
- c Constant value (c= 1.68055E-07)

TEMPERATURE INTERFACE CIRCUIT

Concerning the temperature sensor of the HTU3500 Series products, the following measuring method described below is based on a voltage bridge divider circuit. It uses only one resistor component (Rbatch) at 1% to design HTU3500 temperature sensor interfacing circuit.

Rbatch is chosen to be equal to NTC @25°C to get: Vout = Vcc/2 @25°C.

The proposal method connects Rbatch to Vcc and NTC to Ground. It leads to a negative slope characteristic (Pull-Up Configuration).



$$V_{OUT}(mV) = \frac{Vcc(mV) * NTC_{HTU3500}(\Omega)}{R_{batch}(\Omega) + NTC_{HTU3500}(\Omega)}$$

| Temperature (°C) | Resistance (Ω) | For HTU3533 products (VCC=3VDC) Pull-Up Configuration Vout (mV) | For HTU3535 products (VCC=5VDC) Pull-Up Configuration Vout (mV) |
|---------------------|-----------------------|--|--|
| -40 | 195652 | 2854 | 4757 |
| -30 | 113347 | 2757 | 4595 |
| -20 | 68237 | 2617 | 4361 |
| -10 | 42506 | 2429 | 4048 |
| 0 | 27219 | 2194 | 3657 |
| 10 | 17926 | 1926 | 3210 |
| 20 | 12081 | 1641 | 2736 |
| 25 | 10000 | 1500 | 2500 |
| 30 | 8315 | 1362 | 2270 |
| 40 | 5834 | 1105 | 1842 |
| 50 | 4161 | 882 | 1469 |
| 60 | 3014 | 695 | 1158 |
| 70 | 2228 | 547 | 911 |
| 80 | 1669 | 429 | 665 |
| 85 | 1452 | 380 | 634 |

Storage Conditions and Handling Instructions

It is recommended to store HTU3500 Series sensor in its original packaging at following conditions: Temperature shall be in the range of $-40^{\circ}C - 125^{\circ}C$

APPLICATION: DEW POINT TEMPERATURE MEASUREMENT

The **dew point** is the temperature at which the water vapor in the air becomes saturated and condensation begins.

The dew point is associated with relative humidity. A high relative humidity indicates that the dew point is closer to the current air temperature. Relative humidity of 100% indicates that the dew point is equal to the current temperature (and the air is maximally saturated with water). When the dew point stays constant and temperature increases, relative humidity will decrease.

Dew point temperature of the air is calculated using Ambient Relative Humidity and Temperature measurements from HTU3500 Series sensor with following formulas given below

Partial Pressure (PP_{Tamb}) formula from Ambient Temperature:

$$PP_{Tamb} = 10^{\left[A - \frac{B}{(Tamb + C)}\right]}$$

Dew point Temperature (T_d) formula from Partial Pressure (PP_{Tamb}):

$$T_{d} = -\left[\frac{B}{\log_{10}\left(RH_{amb} \times \frac{PP_{Tamb}}{100}\right) - A} + C\right]$$

| PPTamb | Partial Pressure in mmHg at ambient temperature (T _{amb}) |
|-------------------|--|
| RH _{amb} | Ambient humidity in %RH, computed from HTU3500 Series sensor |
| T _{amb} | Humidity cell temperature in °C, computed from HTU3500 Series sensor |
| Td | Calculated Dew Point in °C |
| A, B, C | Constants: A=8.1332; B=1762.39; C=235.66 |

CONNECTING AND MECHANICAL CHARACTERISTRICS

CONNECTING CHARACTERISTICS

| Connector Type* | Symbol | Overview | Connector Pitch | Mating Connector |
|---|--------|---|--|------------------------------------|
| Medium Male Connector ^{(1) (2)} (1.91 mm – 0.075 in long) | PVBM | 1 8 1 3 5 1 5 1 5 1 5 1 5 1 5 1 5 1 5 1 5 1 | (2,00) .0787 (2,00) .0787 .0787 .0787 .0787 .050 × 0.50) .020 × .020 | Direct Soldering (through hole) |

* For alternate connector type, please contact factory.

⁽¹⁾ For board-to-board mounting, we suggest wave soldering.

⁽²⁾ Pins are connected by twos.

| | Pin Out Assignment | | | | |
|-----|---------------------------|--|--|--|--|
| N° | Function | | | | |
| 1/8 | Ground | | | | |
| 2/7 | Vcc – Voltage Supply | | | | |
| 3/6 | Tout – Temperature | | | | |
| 4/5 | RHout – Relative Humidity | | | | |

WIRING CHARACTERISTICS

| Connector Type | Symbol | Overview | More information* | Remote Mating Connector* |
|----------------|--------|----------------|--|-----------------------------|
| N/A | WxxGyy | A THE MARKET A | Wxx: Wiring cable length* in mm Gyy: Wiring cable type* (from AWG 24 to 30): | N/A |

* On request, please contact factory.

| N° | Colour | Function |
|----|--------|---------------------------|
| 1 | Black | Ground |
| 2 | Red | Vcc – Voltage Supply |
| 3 | Brown | Tout – Temperature |
| 4 | Yellow | RHout – Relative Humidity |

Pin Out Assignment (with wires)

RESISTANCE TO PHYSICAL AND CHEMICAL STRESSES

HTU3500 series modules have been tested according to table below:

| Environment | Standard | Results |
|--|--|---|
| Salt atmosphere | JESD22-A107-A | Within specification |
| Temperature cycling | -20°C / +85°C, 168 hours | Within specification |
| Thermal shocks | -20°C / +85°C, 500 cycles | Within specification |
| High temperature / Humidity operating life | 93%RH / +60°C, 168 hours | Within specification |
| Resistance to immersion into water | Ambient temperature | Within specification |
| Low temperature storage | -20°C, 500 hours | Within specification |
| High temperature storage | +85°C, 500 hours | Within specification |
| ESD immunity | JEDEC JESD22-A114 JEDEC JESD22-A115 | Within specification* Within specification** |

 * JEDEC JESD22-A114 method for connections & open window (Human Body Model at $\pm 8kV$ powered and unpowered)

**JEDEC JESD22-A115 method (Machine Model ±200V)

HTU3500 Series are protected against reverse polarity.

HTU3500 Series are not light sensitive


ENVIRONMENTAL AND RECYCLING

HTU3500 series modules are lead free components and are compatible with Pb Free soldering process.

HTU3500 series modules are free from Cr (6+), Cd and Hg.

PACKAGE OUTLINE

MECHANICAL CHARACTERISTICS: HTU3500 SERIES PACKAGE OUTLINE

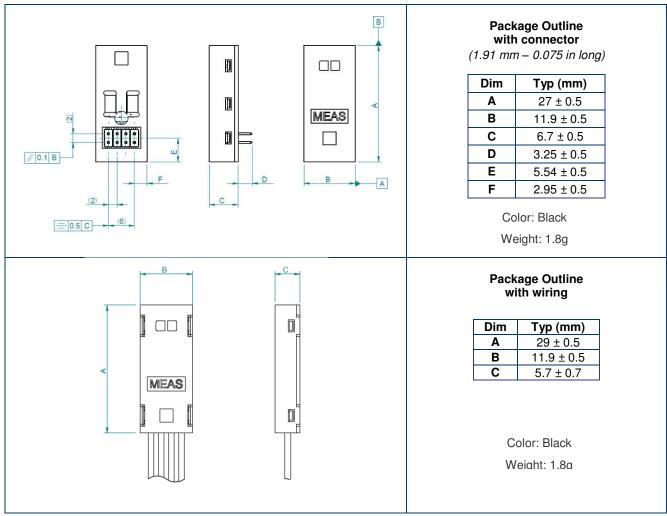

Double coated adhesive tape could be used on plastic housing area (ref: 3M - 5925F) to fix parts

ORDERING INFORMATION

| Product | Order Reference | Status |
|-------------|-----------------|------------------|
| HTU3515WXGY | HPP831NXXX | In design |
| HTU3535WXGY | HPP831CXXX | Engineering part |
| HTU3535PBVM | HPP831A610 | Serial part |
| HTU3535CH | HPP831AXXX | In design |

Samples are available through MEASUREMENT SPECIALTIES web site:

http://www.meas-spec.com/humidity-sensors.aspx

EUROPE

Measurement Specialties, Inc - MEAS France Impasse Jeanne Benozzi CS 83 163 31027 Toulouse Cedex 3 FRANCE Tél: +33 (0)5 820 822 02 Fax: +33(0)5 820 821 51 Sales: humidity.sales@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.